





GOULDS TURBINE PUMPS 50HZ

LINESHAFT

SUBMERSIBLE



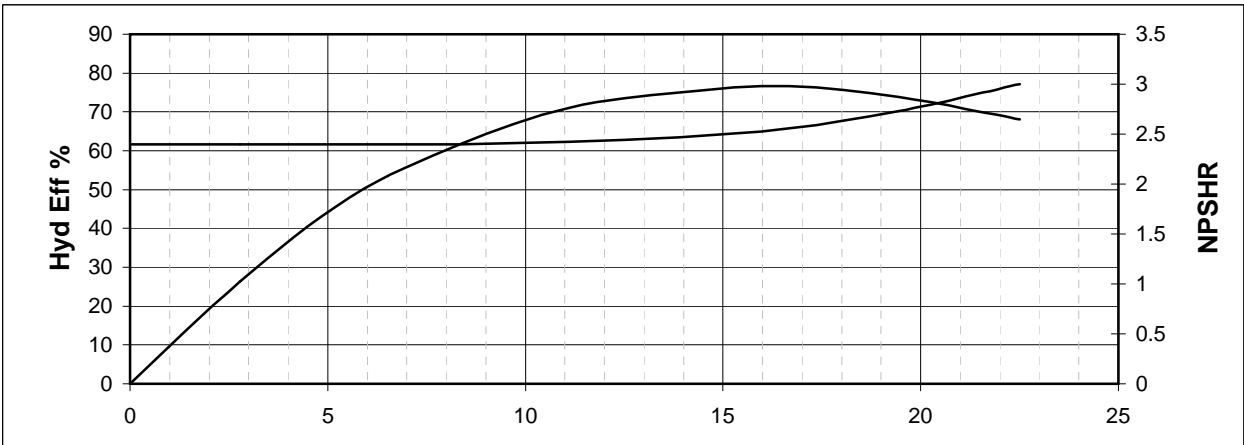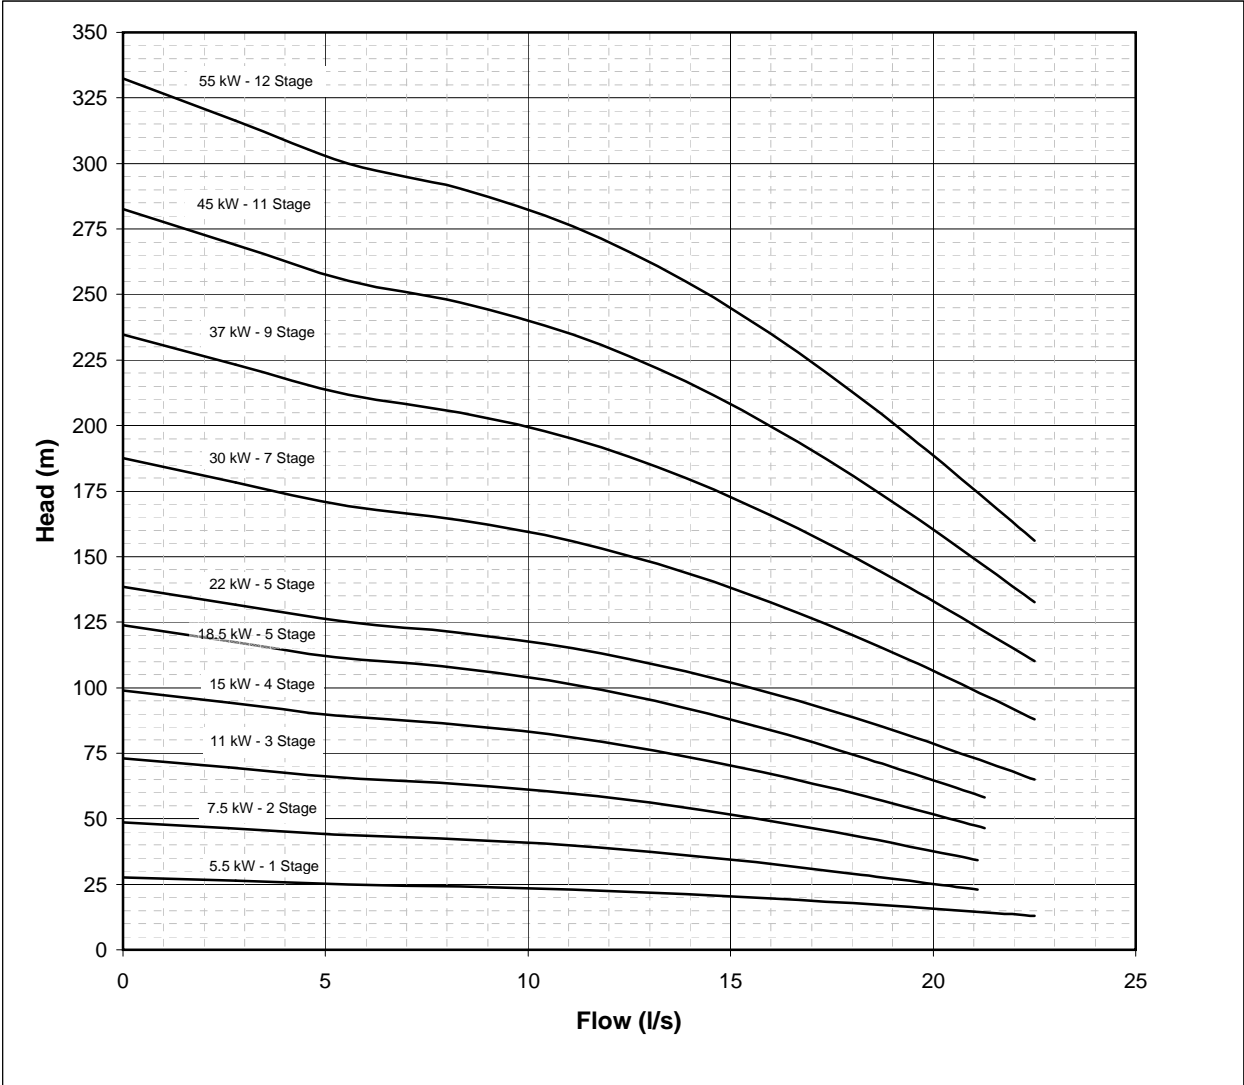

Nema Motor adaptor sizes available : 6 & 8 inch



Pump discharge sizes available, BSP threads : 4 & 6 inch

Maximum diameter of Pump including cable guard : 190.50 mm

Recommended Minimum flow rate at 2875 RPM : 5 l/s

Goolds Pumps



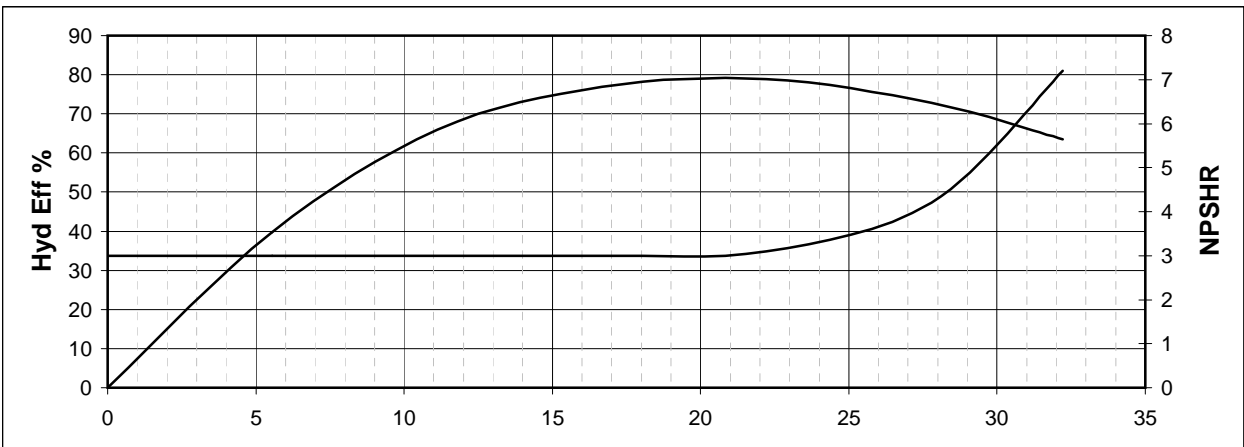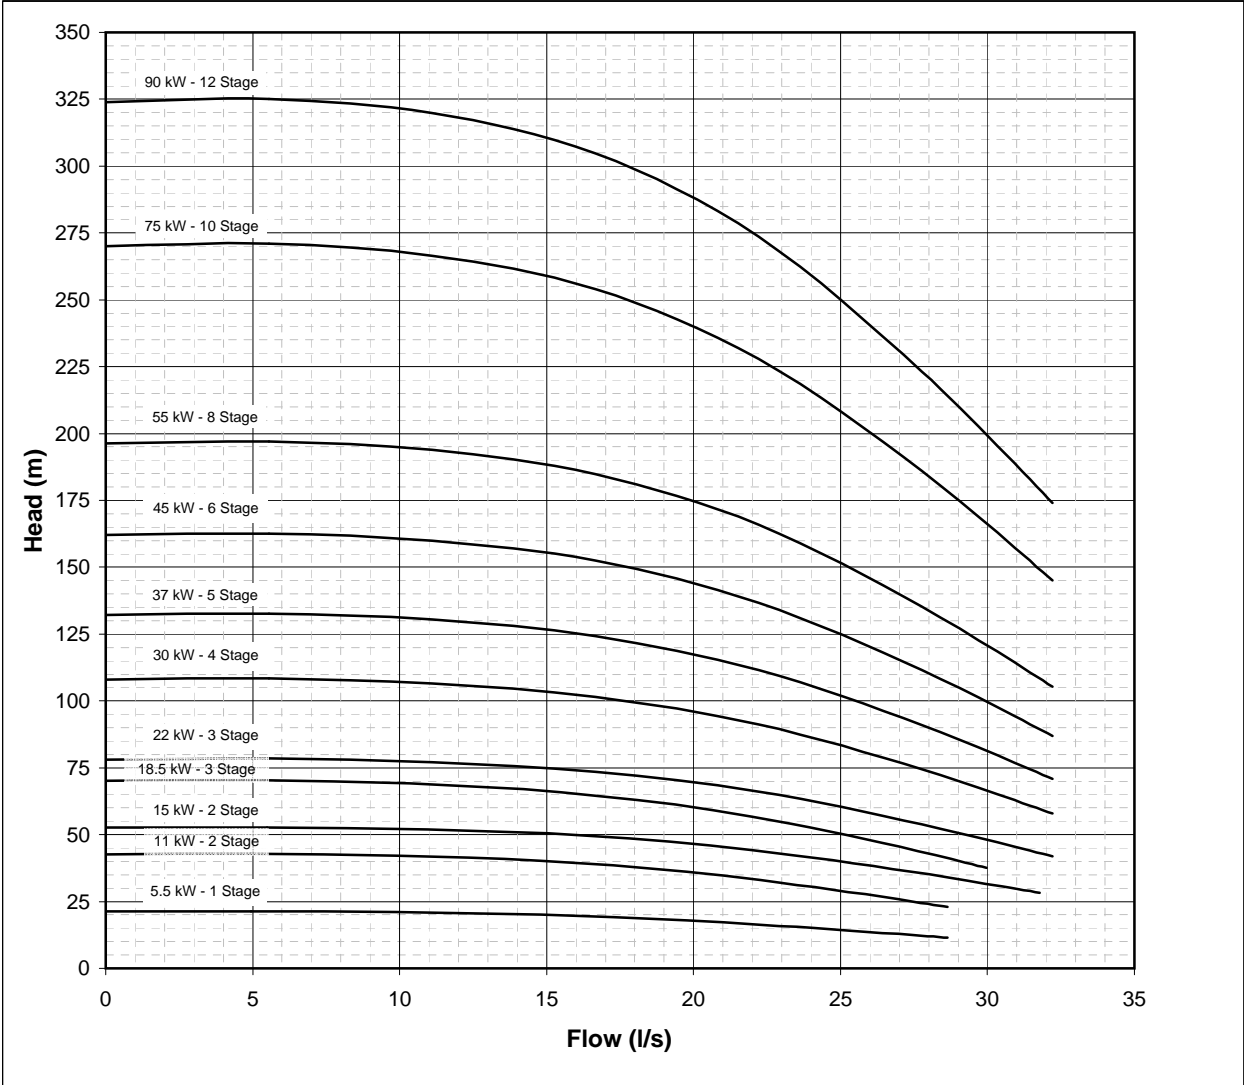

Nema Motor adaptor sizes available : 6 & 8 inch



Pump discharge sizes available, BSP threads : 4 & 6 inch

Maximum diameter of Pump including cable guard : 190.50 mm

Recommended Minimum flow rate at 2875 RPM : 7 l/s

Goulds Pumps



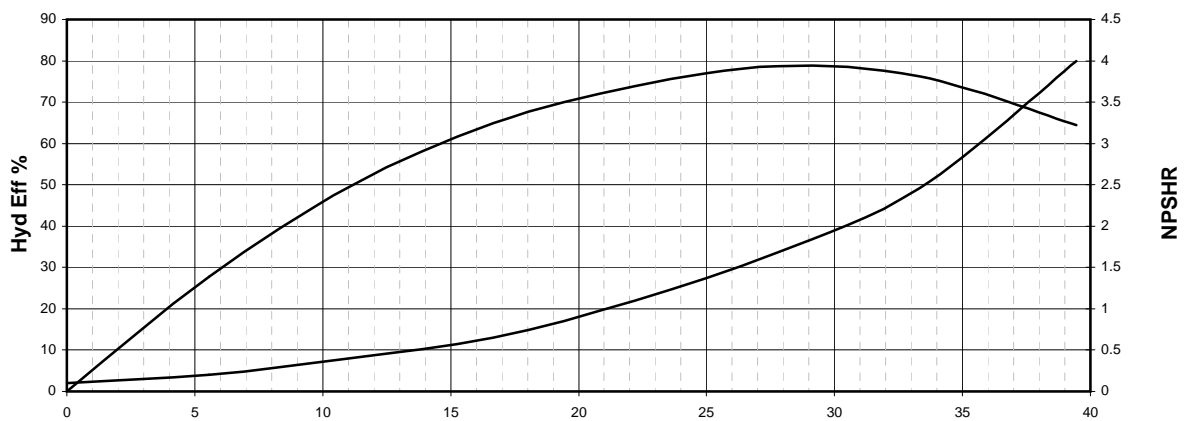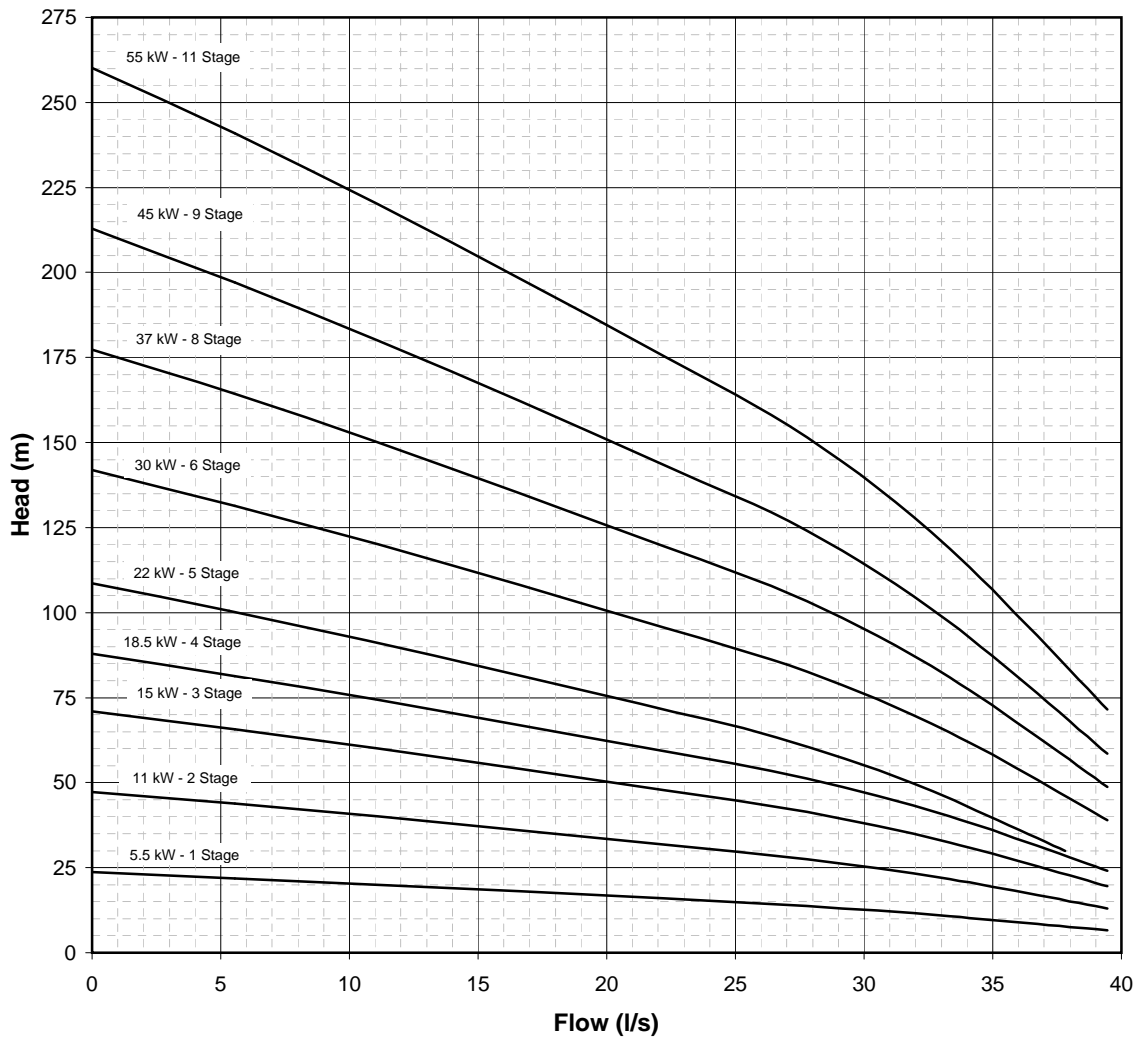

Nema Motor adaptor sizes available : 6 & 8 inch



Pump discharge sizes available, BSP threads : 4 & 6 inch

Maximum diameter of Pump including cable guard : 190.50 mm

Recommended Minimum flow rate at 2875 RPM : 10 l/s

Goolds Pumps



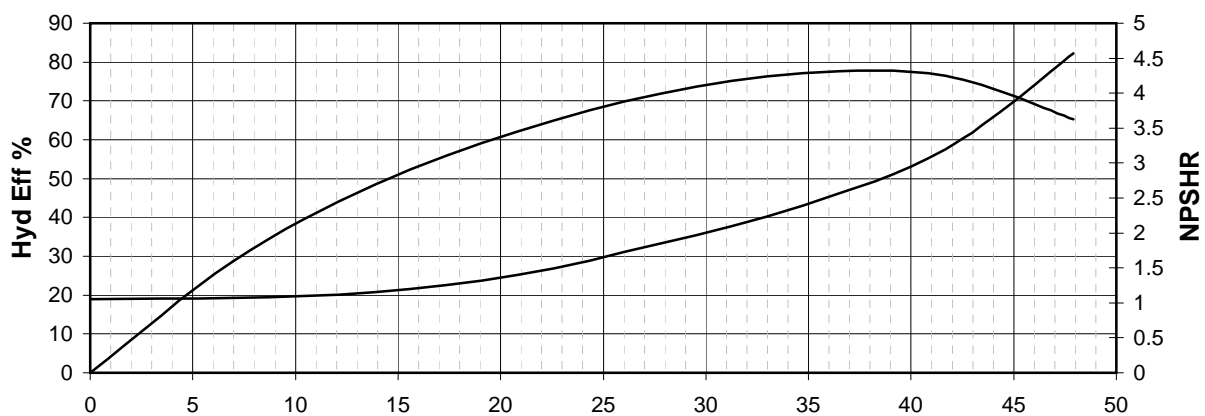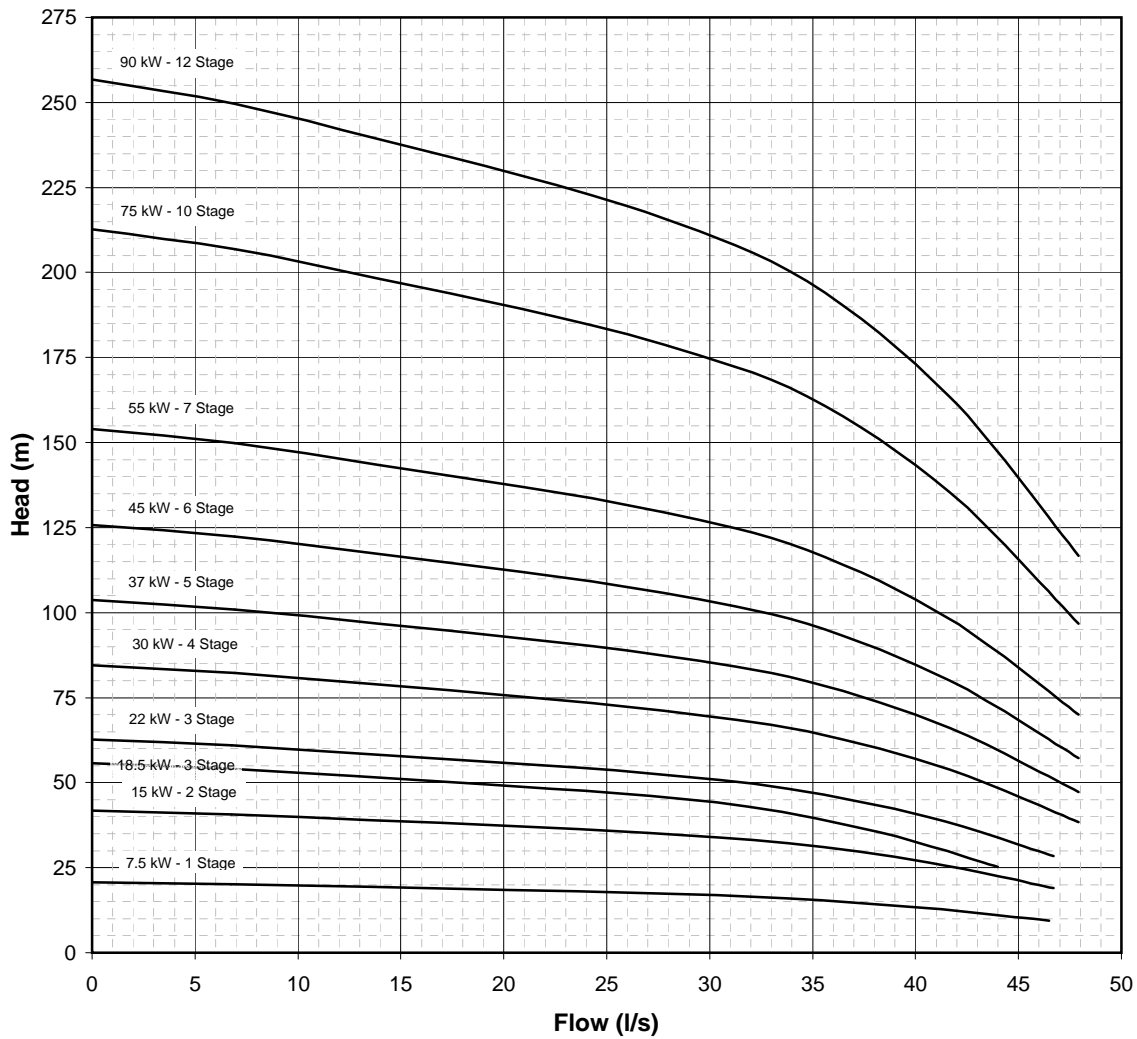

Nema Motor adaptor sizes available : 6 & 8 inch



Pump discharge sizes available, BSP threads : 4 & 6 inch

Maximum diameter of Pump including cable guard : 190.50 mm

Recommended Minimum flow rate at 2875 RPM : 13 l/s

Goolds Pumps



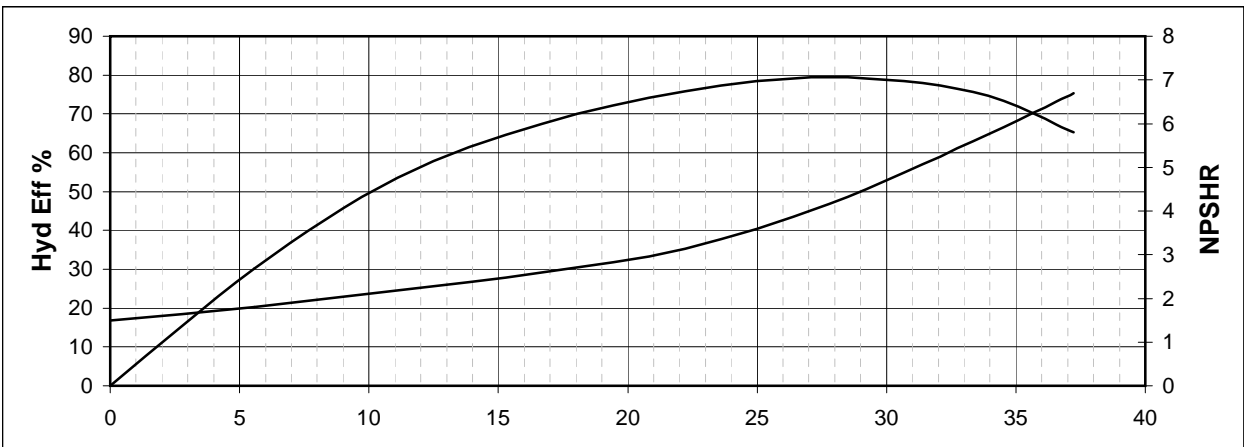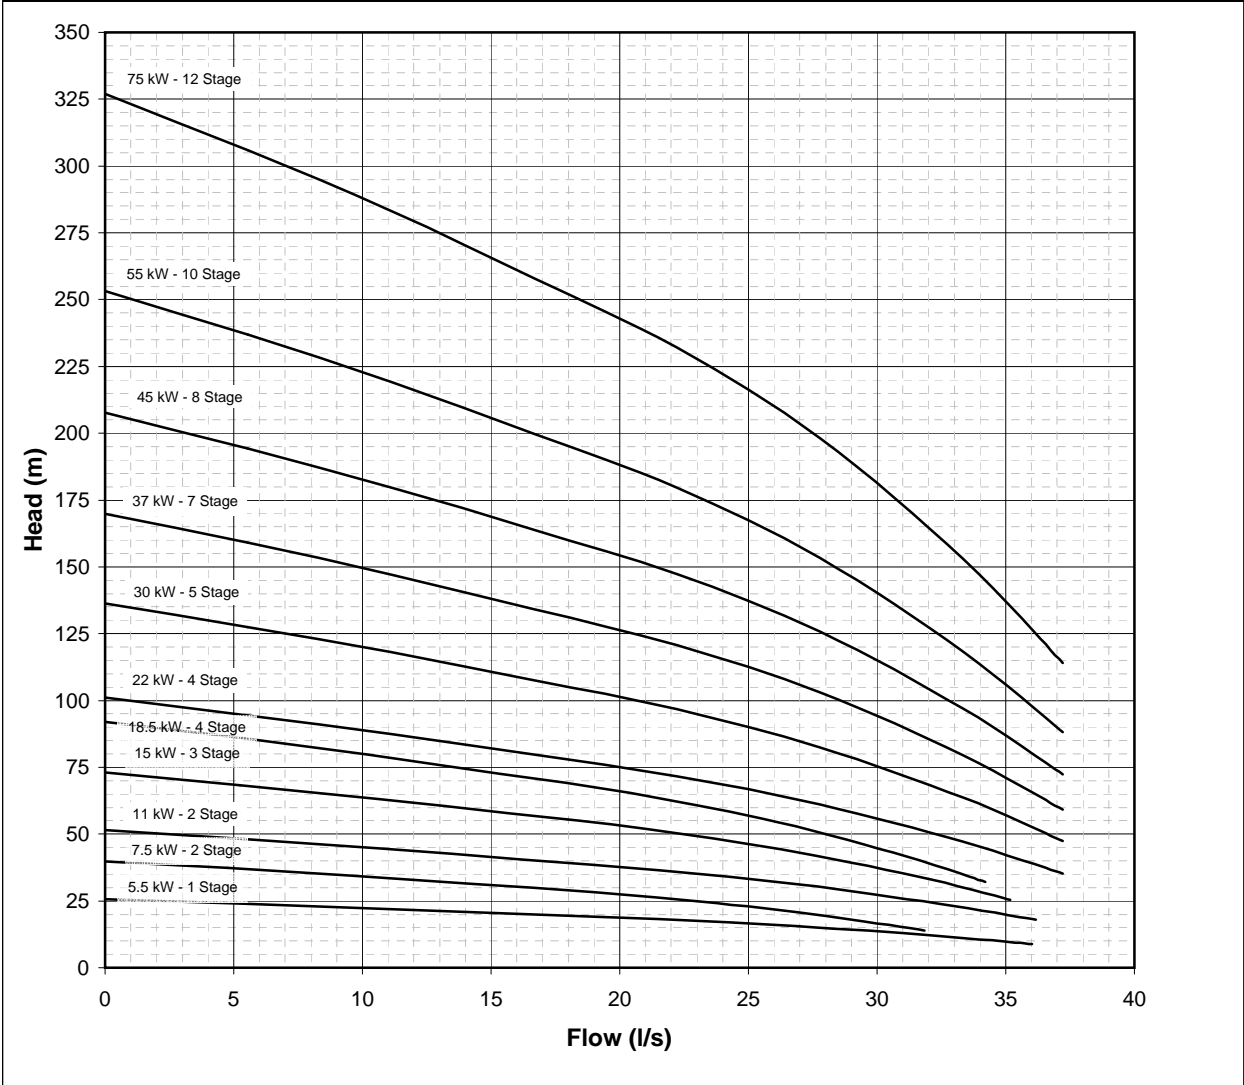

Nema Motor adaptor sizes available : 6 & 8 inch



Pump discharge sizes available, BSP threads : 4 & 6 inch

Maximum diameter of Pump including cable guard : 200.70 mm

Recommended Minimum flow rate at 2875 RPM : 10 l/s

Goulds Pumps



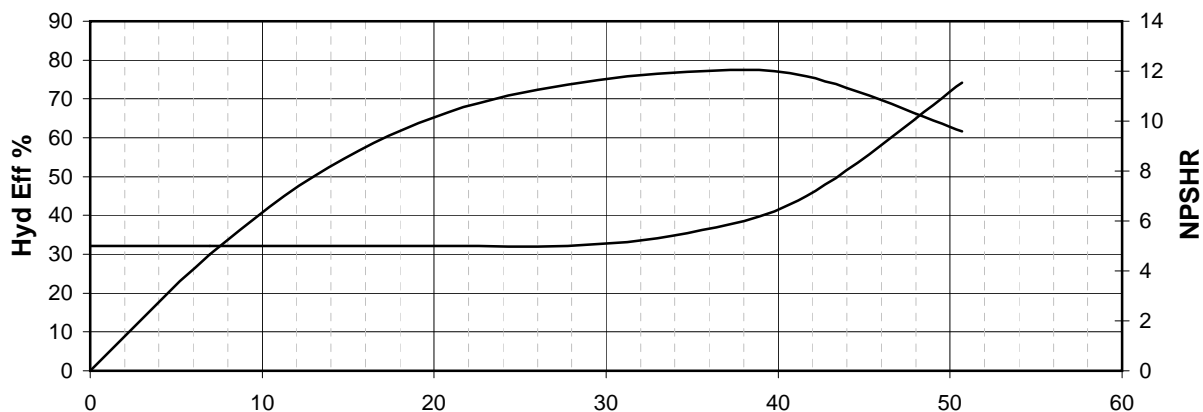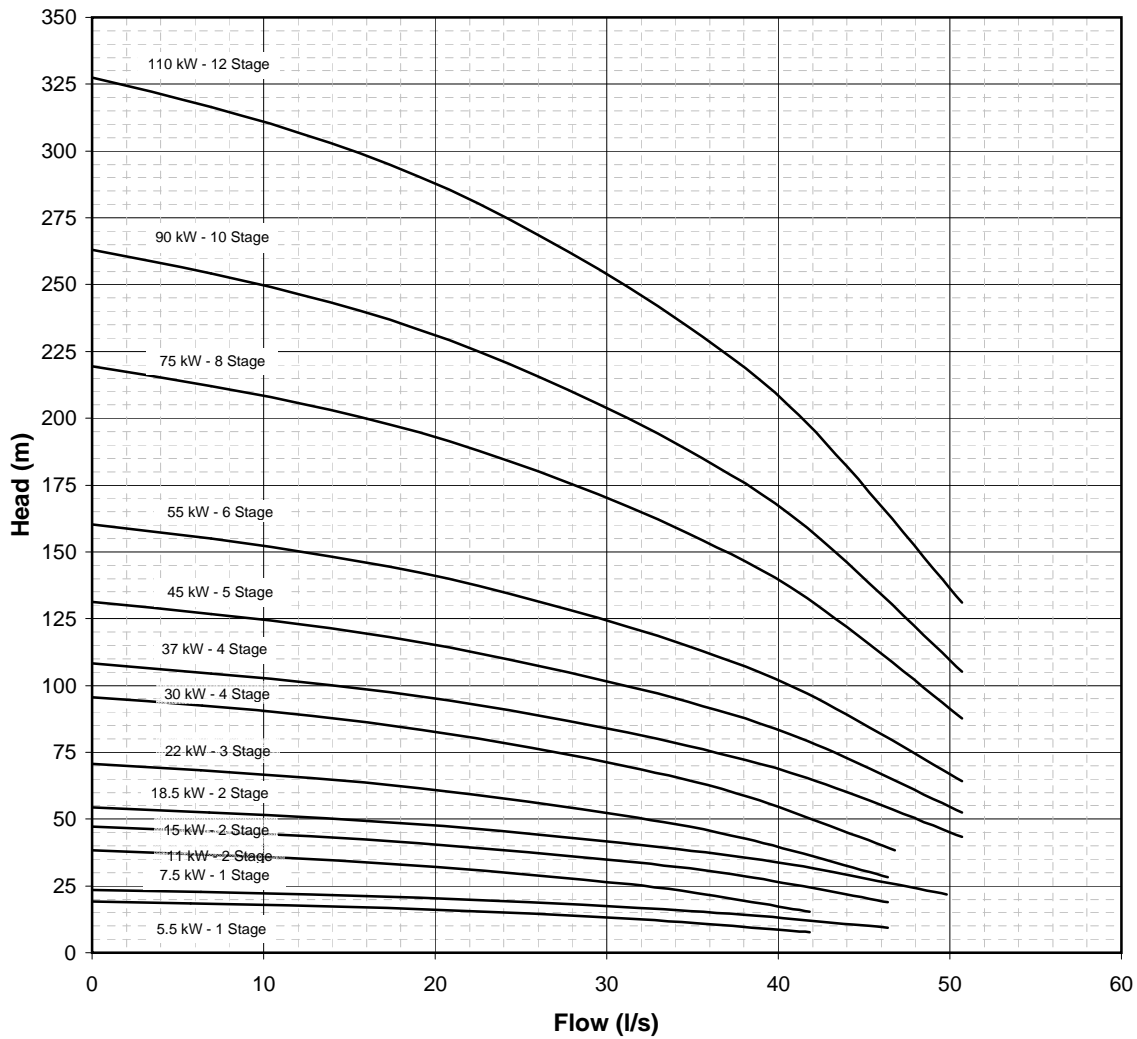

Nema Motor adaptor sizes available : 6 & 8 inch



Pump discharge sizes available, BSP threads : 4 & 6 inch

Maximum diameter of Pump including cable guard : 200.70 mm

Recommended Minimum flow rate at 2875 RPM : 13 l/s

Goulds Pumps



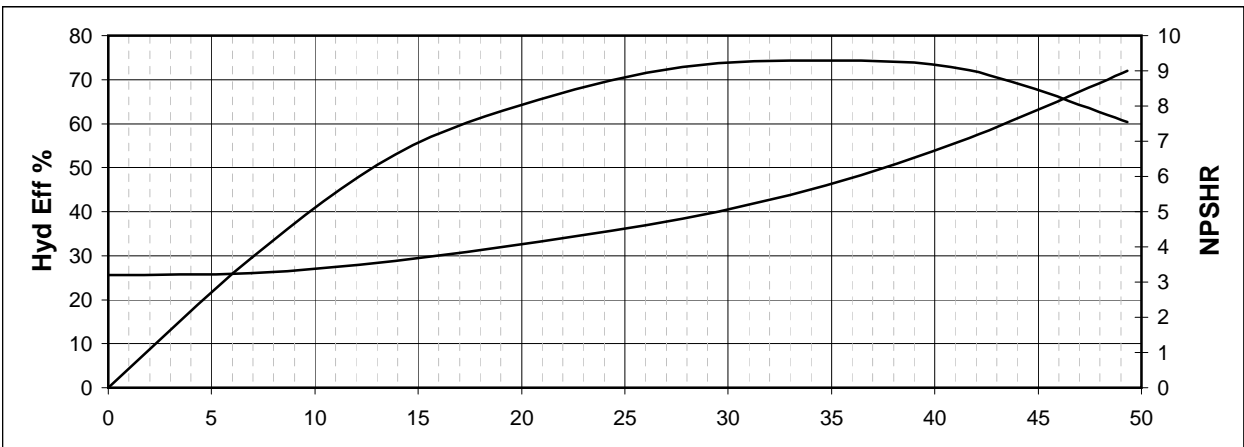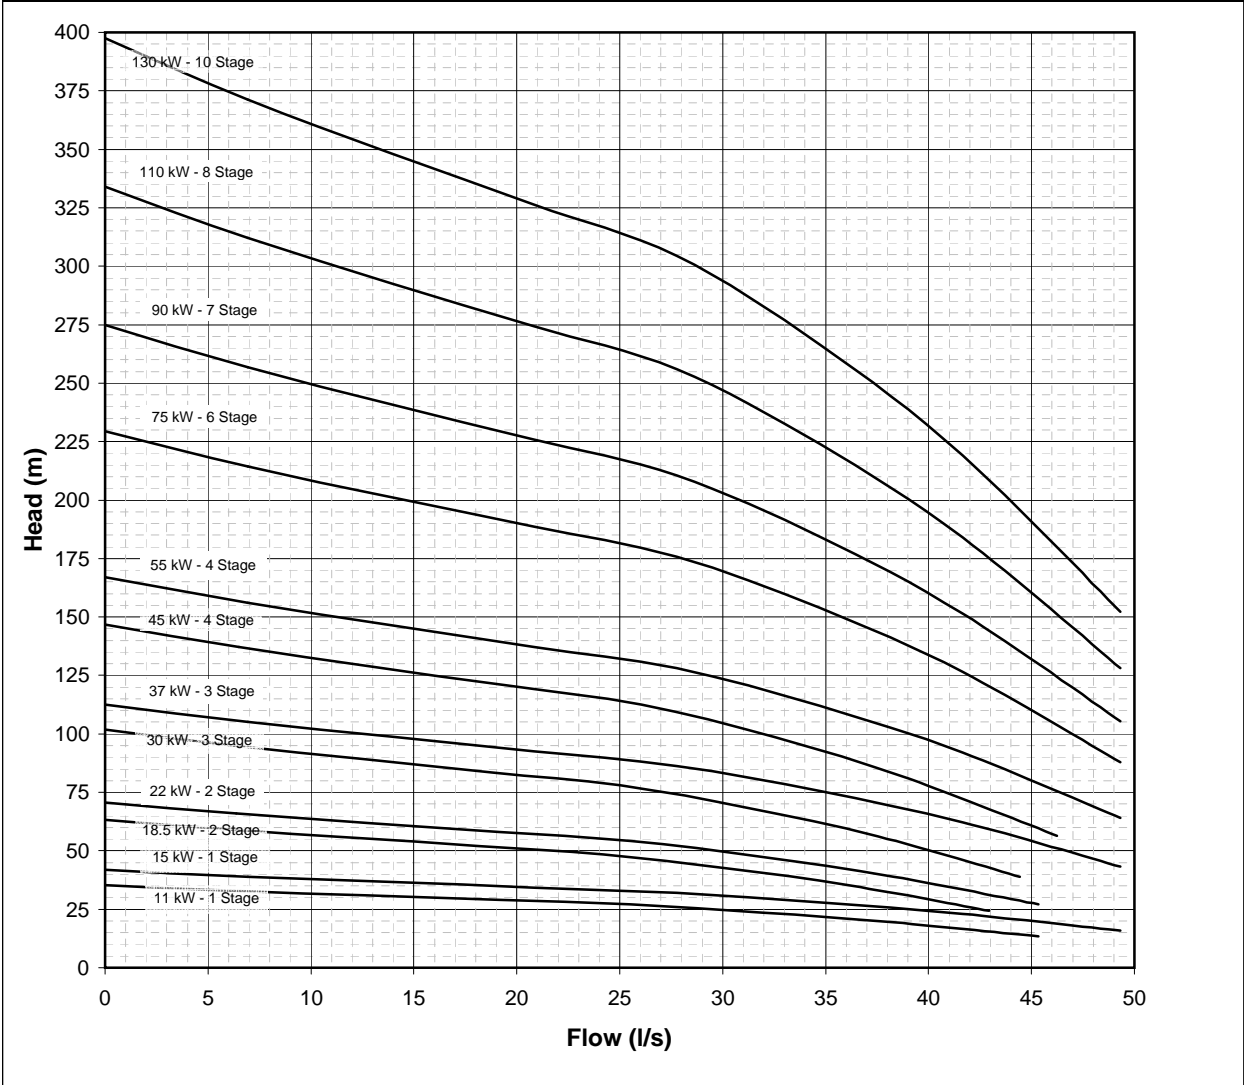

Nema Motor adaptor sizes available : 6 & 8 inch



Pump discharge sizes available, BSP threads : 6 inch

Maximum diameter of Pump including cable guard : 249.20 mm

Recommended Minimum flow rate at 2875 RPM : 14 l/s

Goolds Pumps



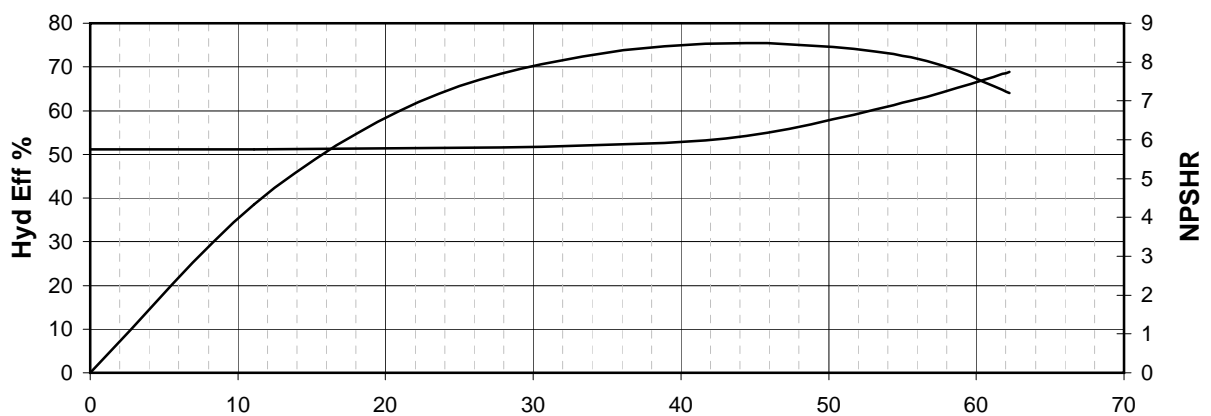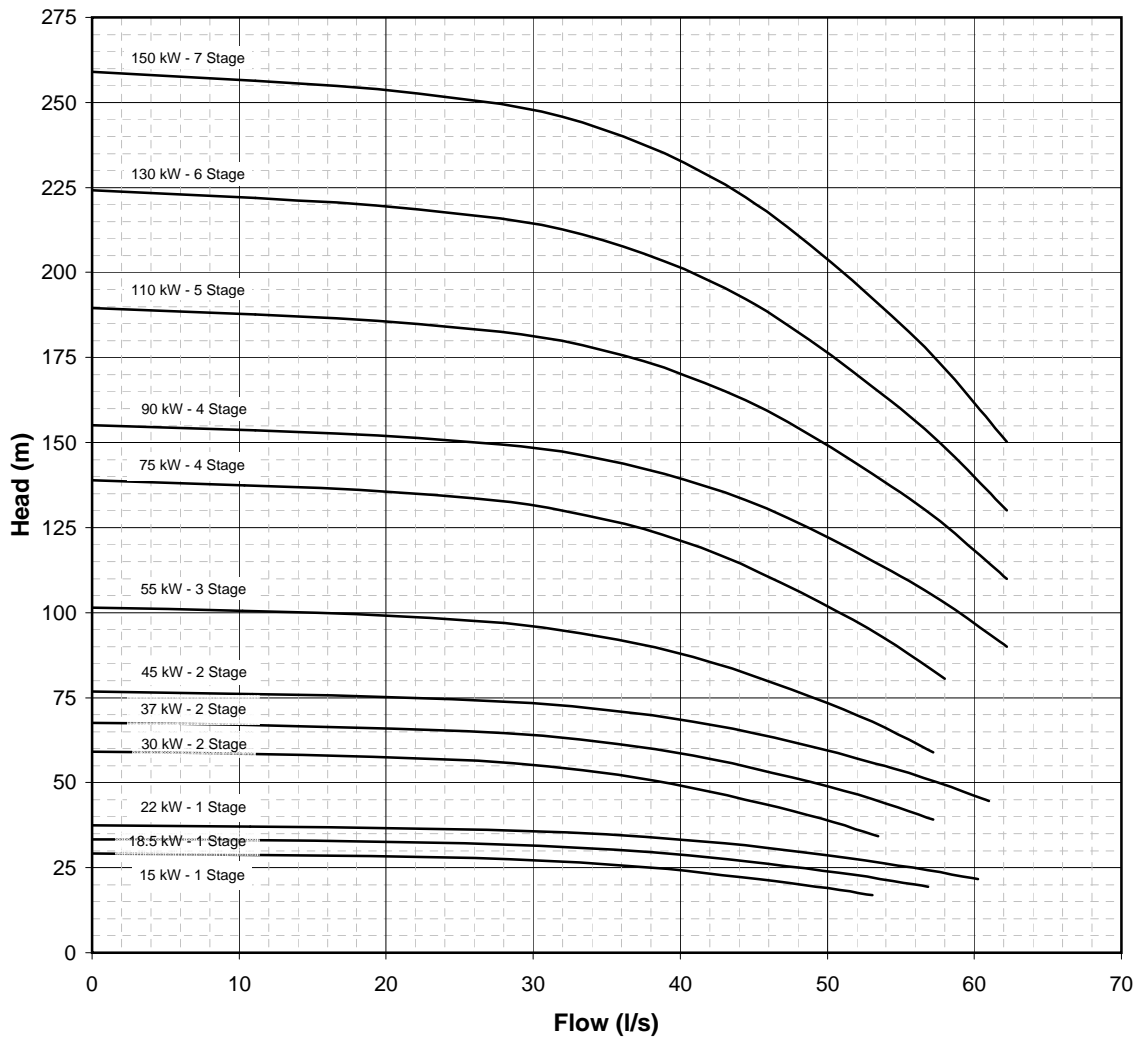

Nema Motor adaptor sizes available : 6 & 8 inch



Pump discharge sizes available, BSP threads : 6 inch

Maximum diameter of Pump including cable guard : 249.20 mm

Recommended Minimum flow rate at 2875 RPM : 16 l/s

Goulds Pumps



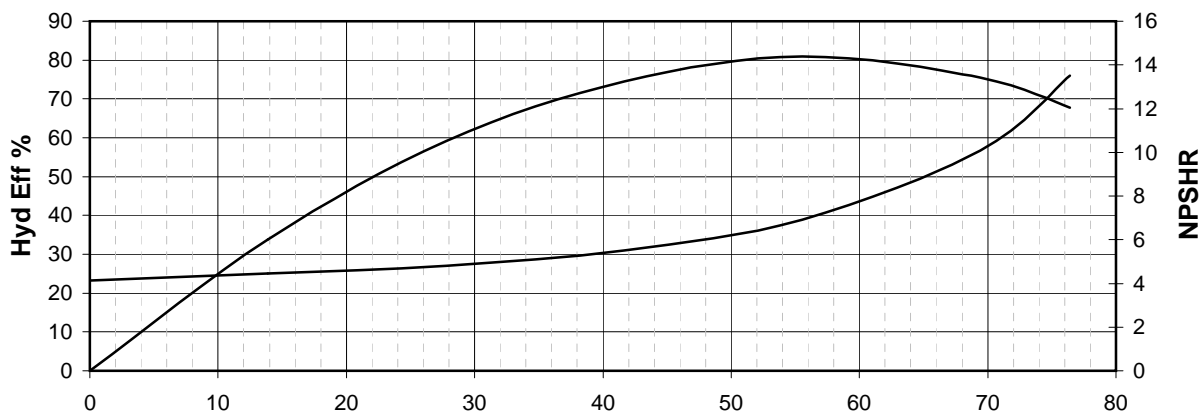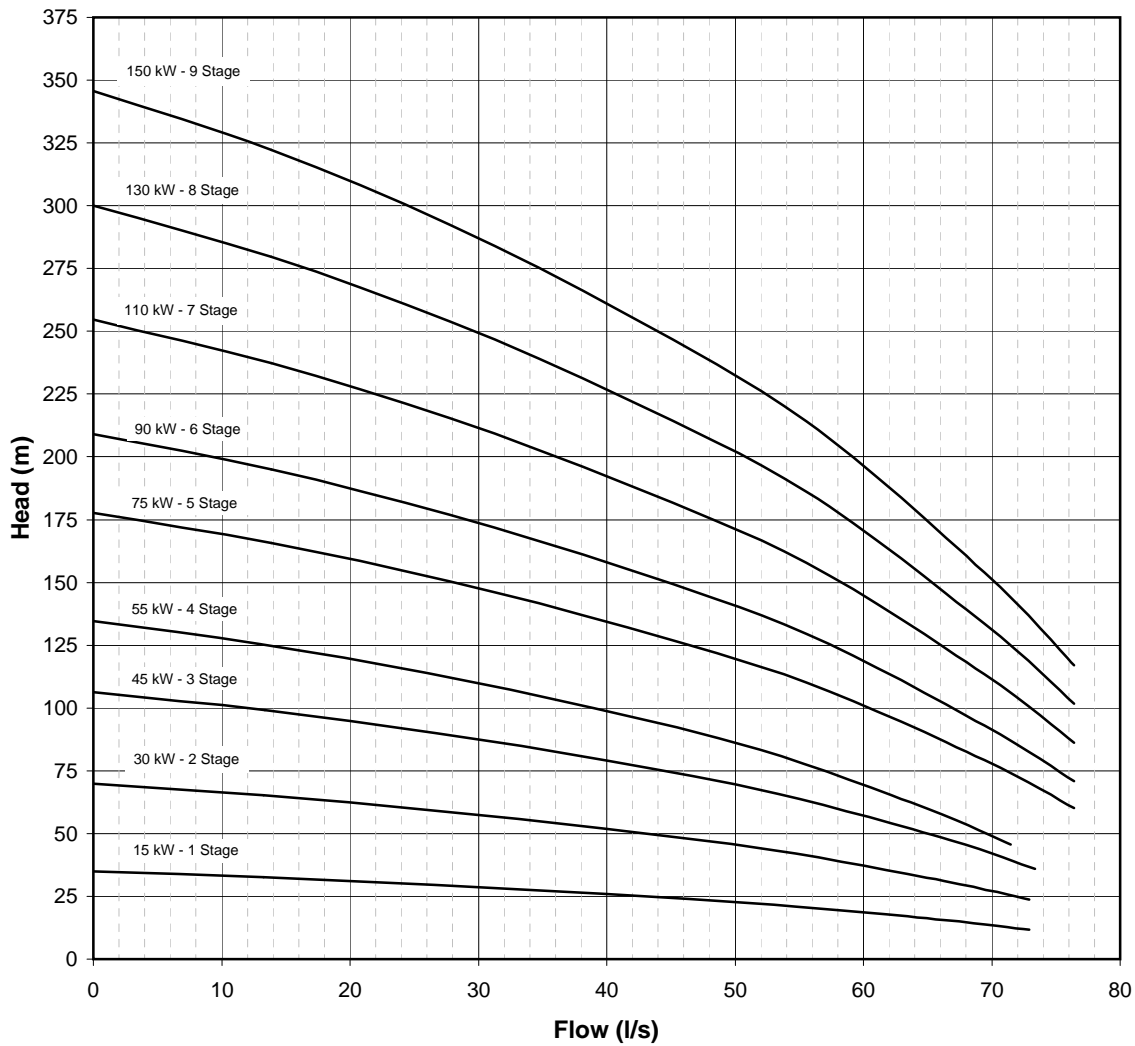

Nema Motor adaptor sizes available : 6 & 8 inch



Pump discharge sizes available, BSP threads : 6 inch

Maximum diameter of Pump including cable guard : 249.20 mm

Recommended Minimum flow rate at 2875 RPM : 18 l/s

Goulds Pumps



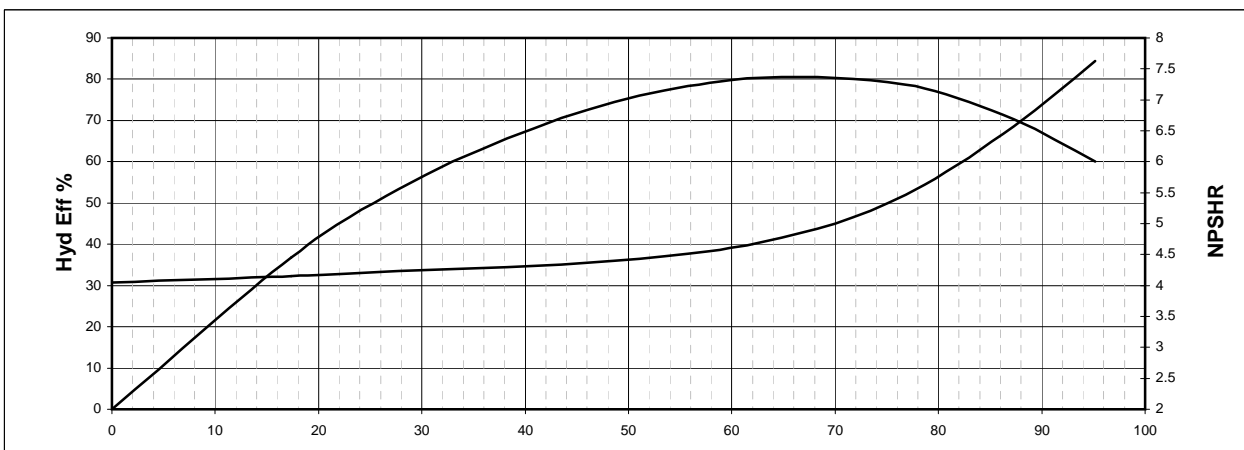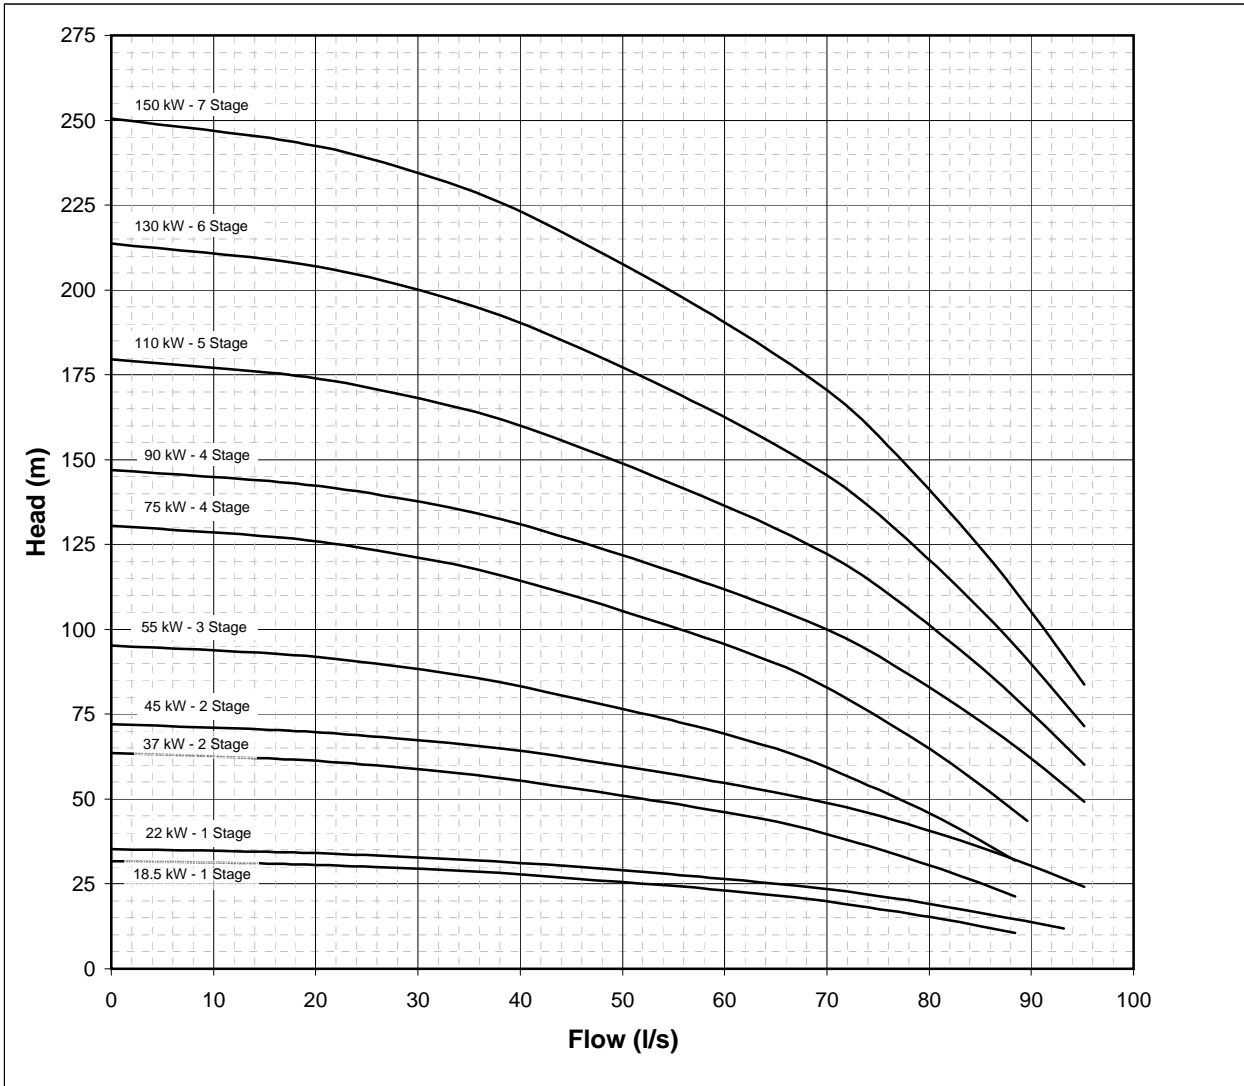

Nema Motor adaptor sizes available : 6 & 8 inch



Pump discharge sizes available, BSP threads : 6 inch

Maximum diameter of Pump including cable guard : 249.20 mm

Recommended Minimum flow rate at 2875 RPM : 24/s

Goulds Pumps



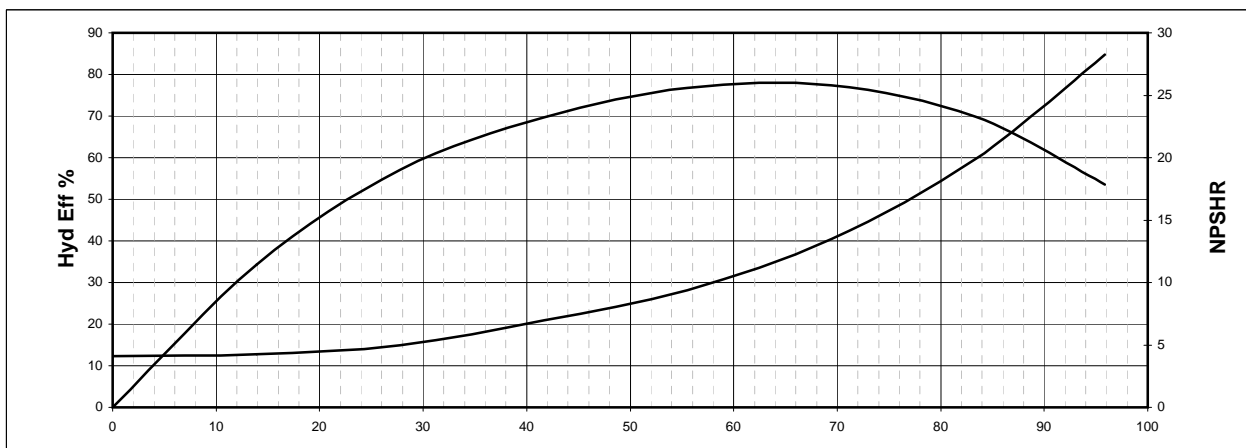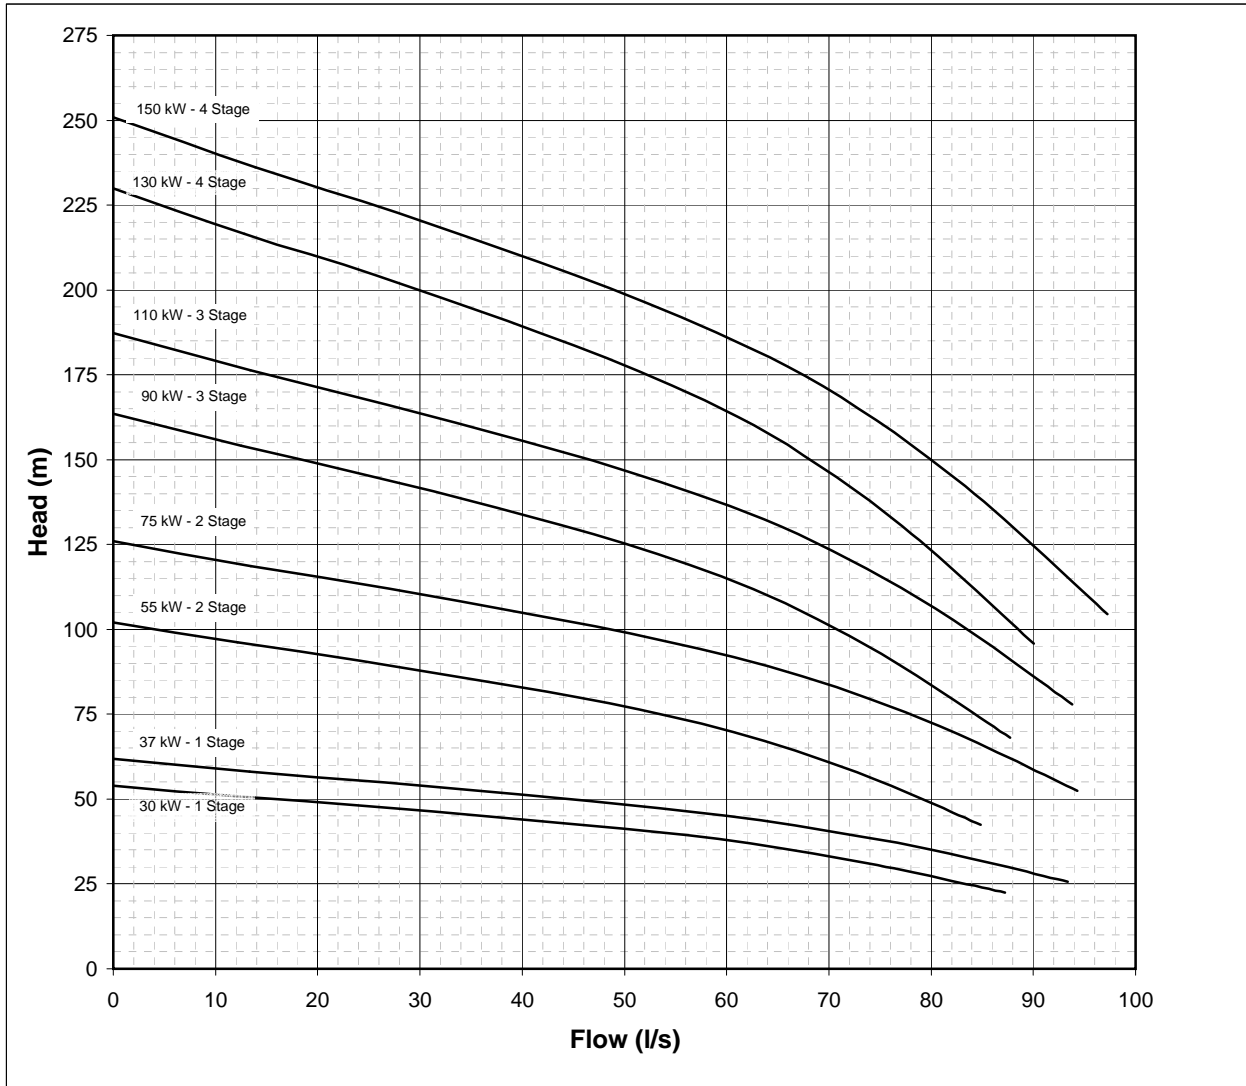

Nema Motor adaptor sizes available : 8 & 10 inch



Pump discharge sizes available, BSP threads : 6 & 8 inch

Maximum diameter of Pump including cable guard : 292.10 mm

Recommended Minimum flow rate at 2875 RPM : 26 l/s

Goulds Pumps



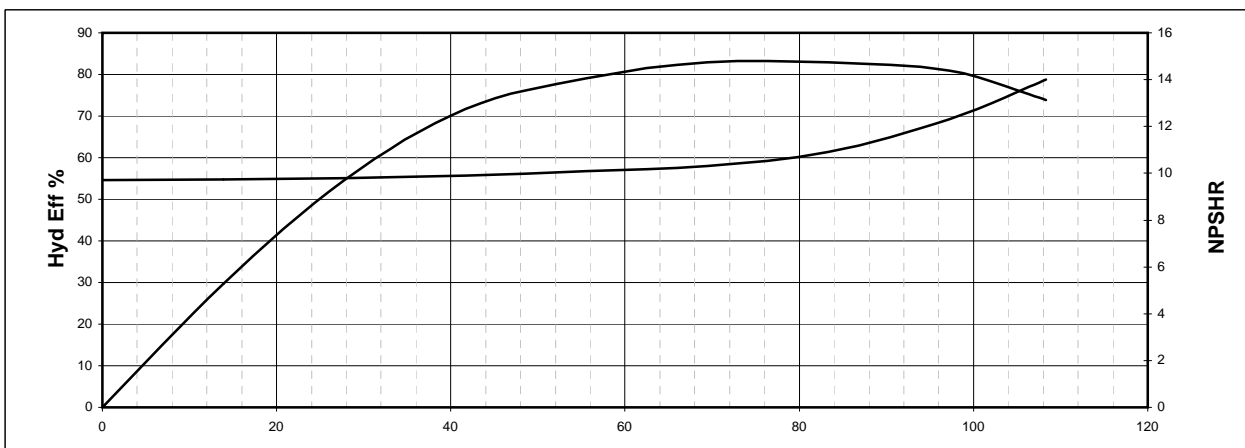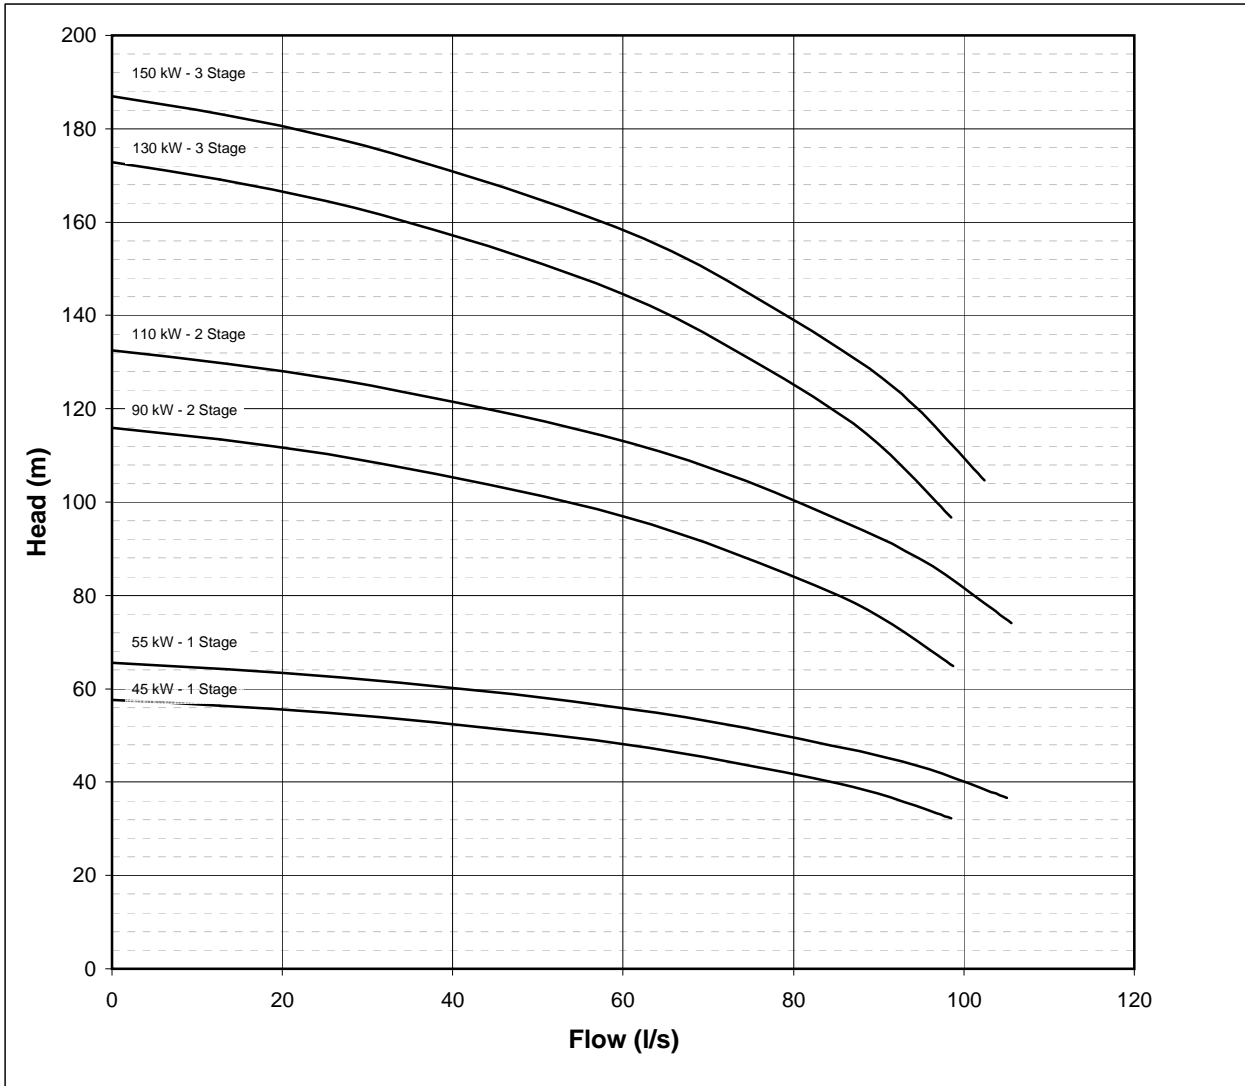

Nema Motor adaptor sizes available : 8 & 10 inch



Pump discharge sizes available, BSP threads : 6 & 8 inch

Maximum diameter of Pump including cable guard : 292.10 mm

Recommended Minimum flow rate at 2875 RPM : 30 l/s

Goulds Pumps



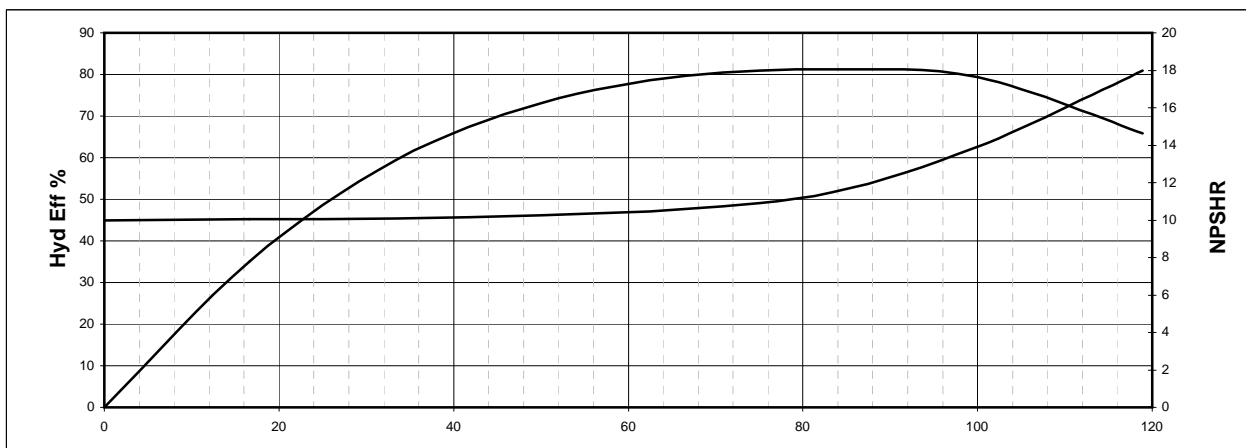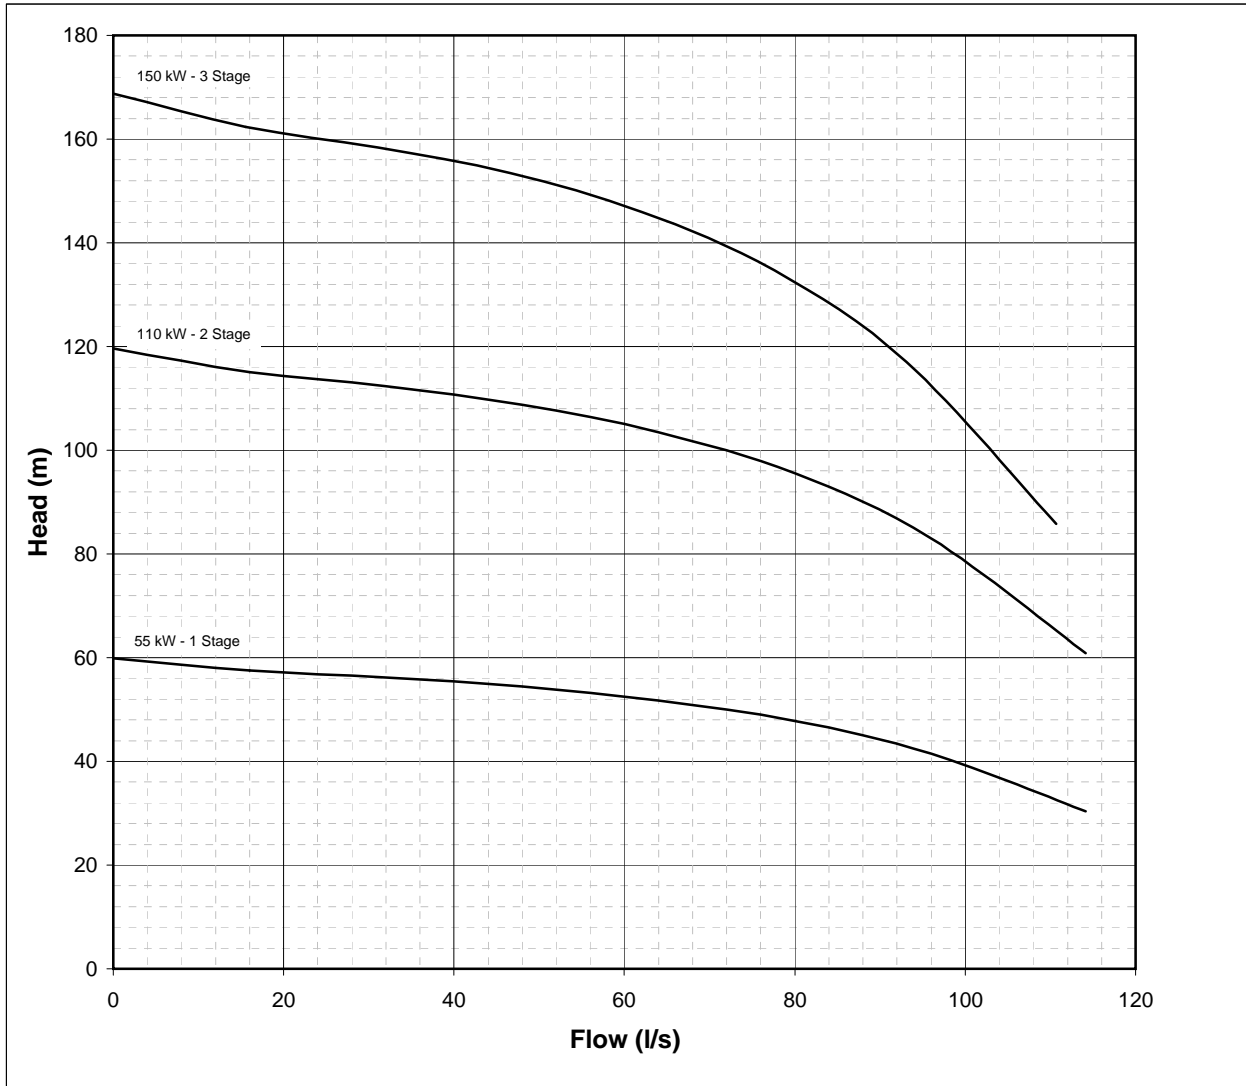

Nema Motor adaptor sizes available : 8 & 10 inch



Pump discharge sizes available, BSP threads : 6 & 8 inch

Maximum diameter of Pump including cable guard : 292.10 mm

Recommended Minimum flow rate at 2875 RPM : 36 l/s

Goulds Pumps



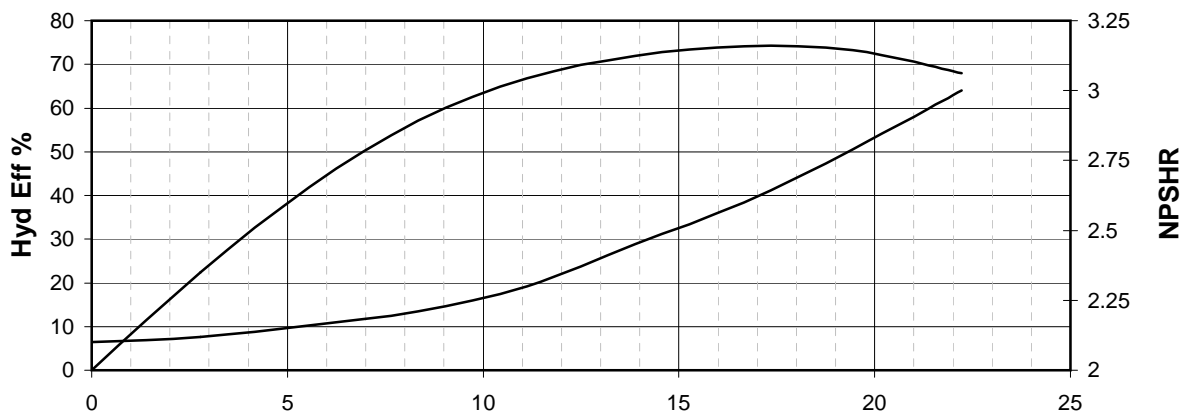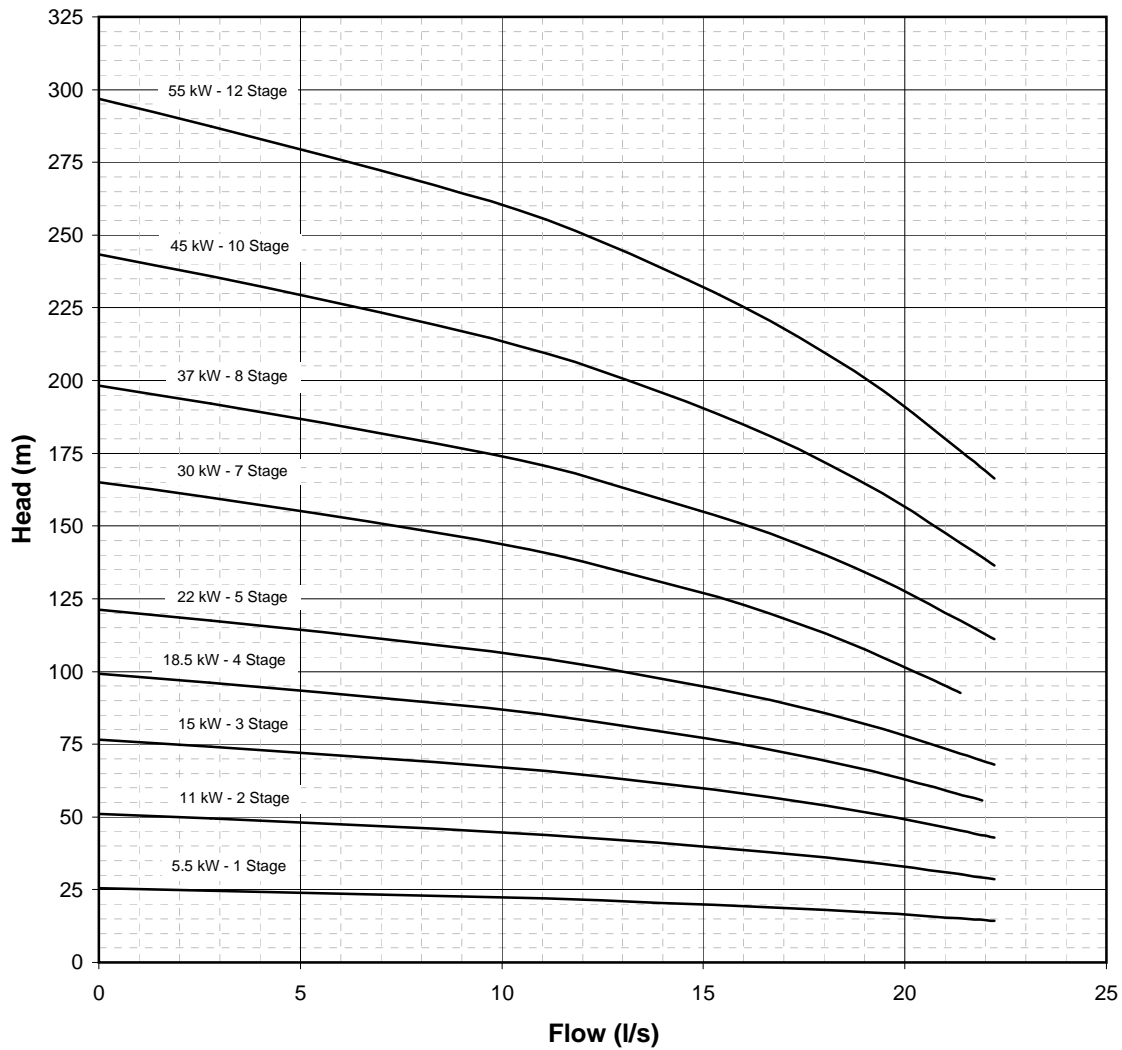

Nema Motor adaptor sizes available : 6 & 8 inch



Pump discharge sizes available, BSP threads : 4 & 6 inch

Maximum diameter of Pump including cable guard : 190.50 mm

Recommended Minimum flow rate at 2875 RPM : 5 l/s

Goulds Pumps



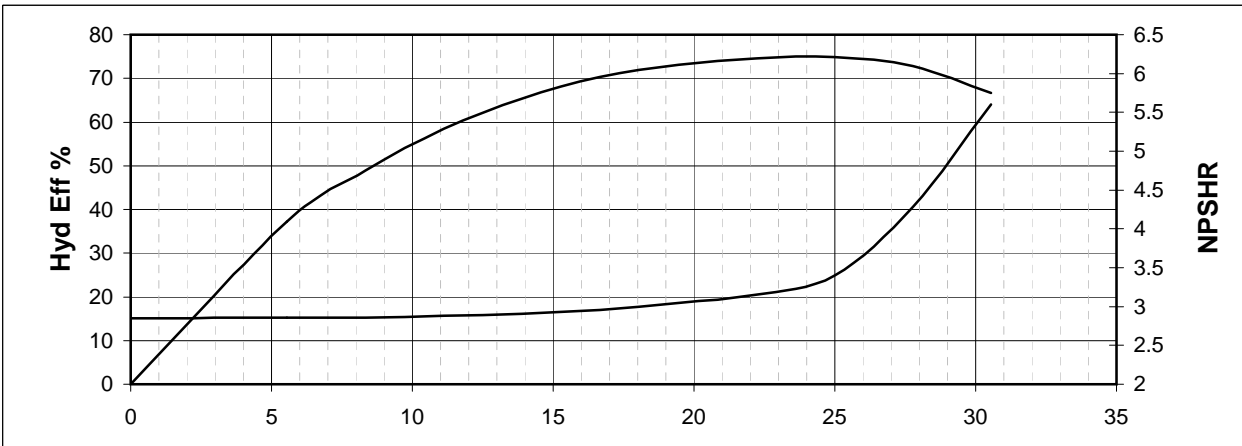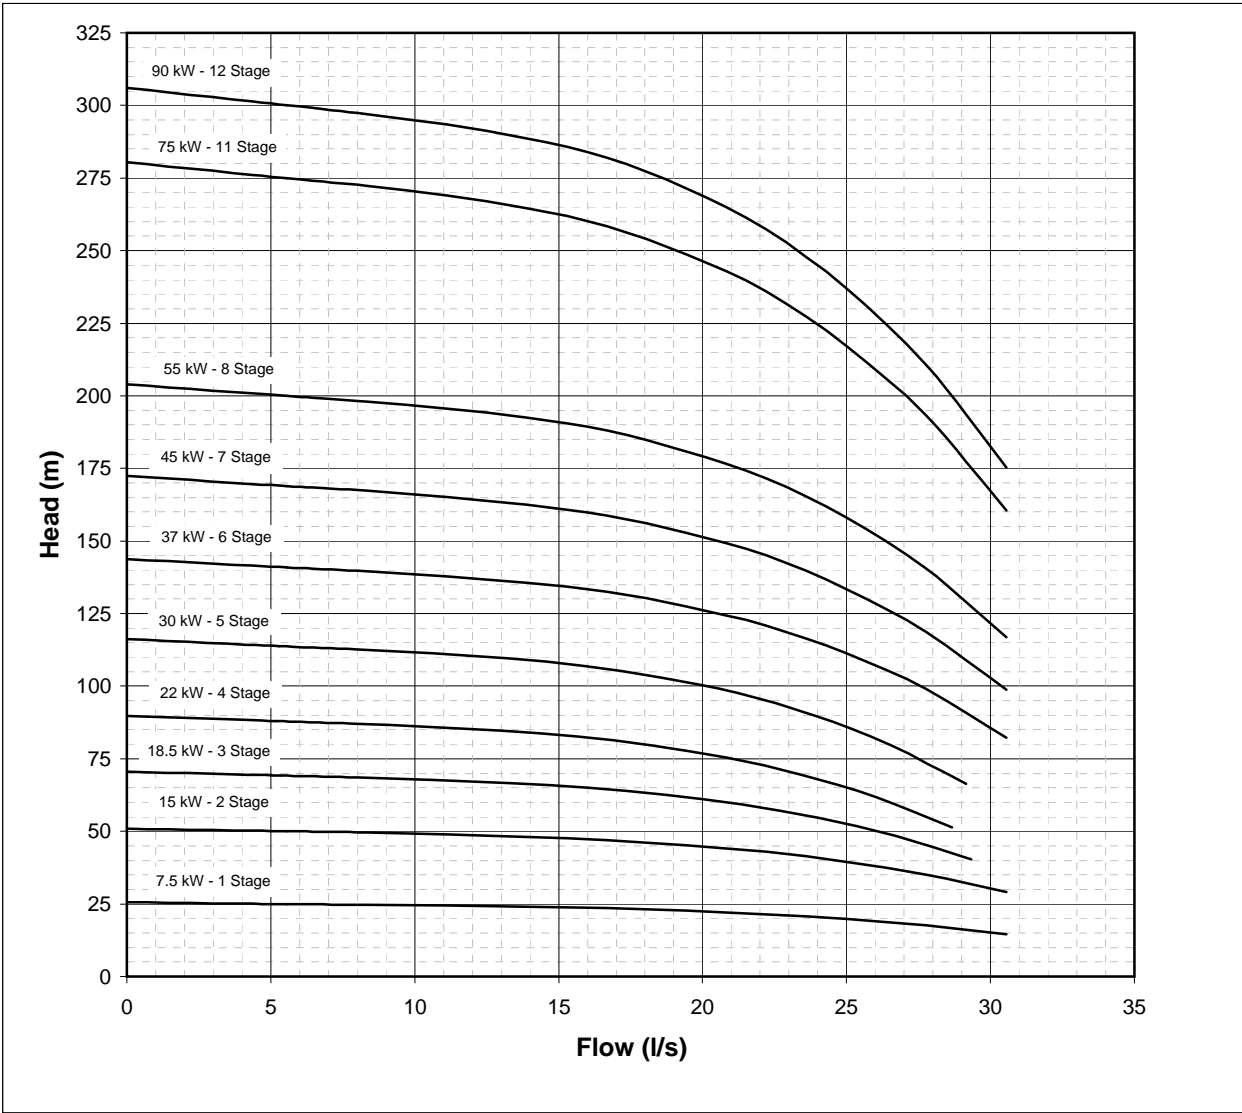

Nema Motor adaptor sizes available : 6 & 8 inch



Pump discharge sizes available, BSP threads : 4 & 6 inch

Maximum diameter of Pump including cable guard : 190.50 mm

Recommended Minimum flow rate at 2875 RPM : 7 l/s

Goulds Pumps



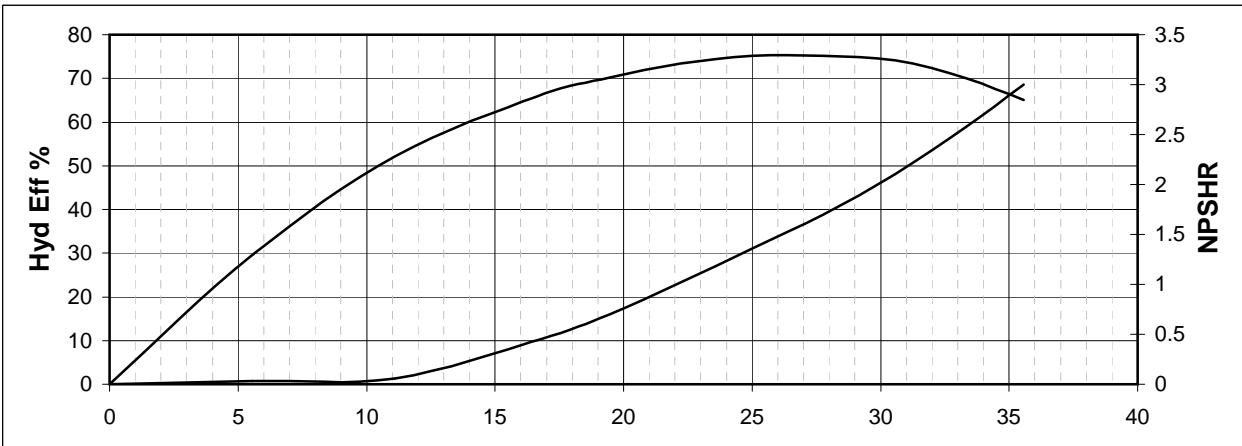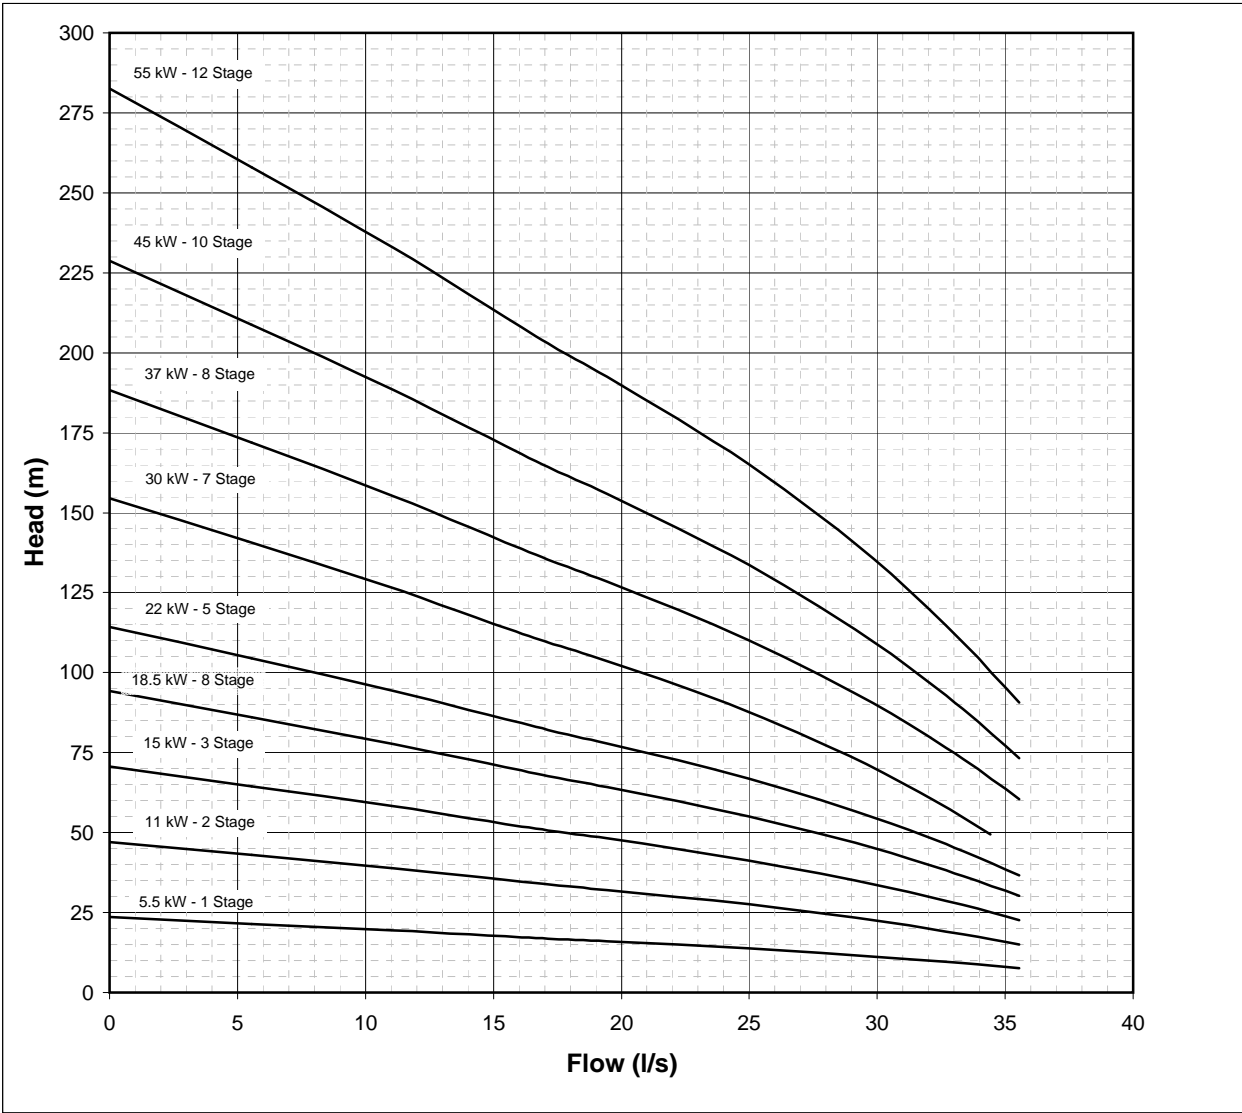

Nema Motor adaptor sizes available : 6 & 8 inch



Pump discharge sizes available, BSP threads : 4 & 6 inch

Maximum diameter of Pump including cable guard : 190.50 mm

Recommended Minimum flow rate at 2875 RPM : 9 l/s

Goulds Pumps



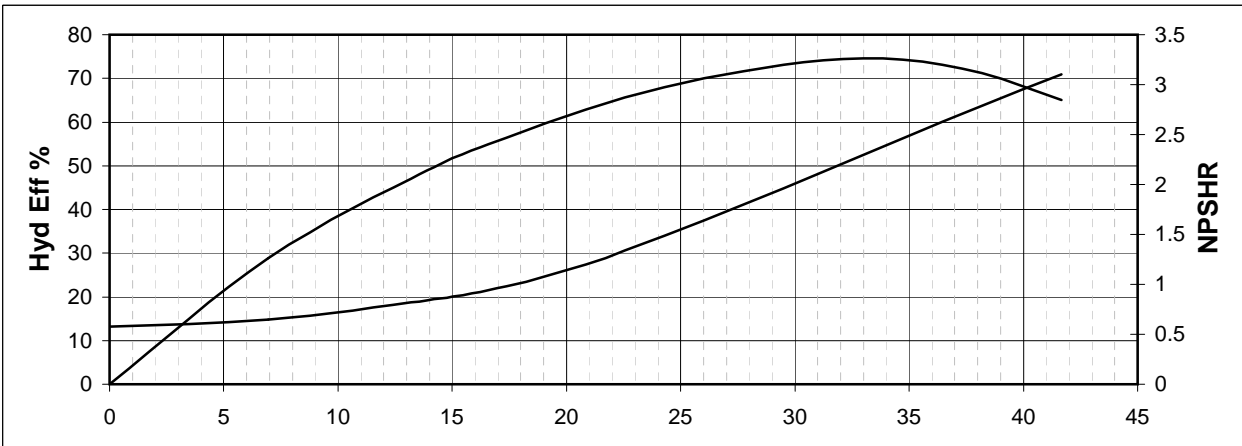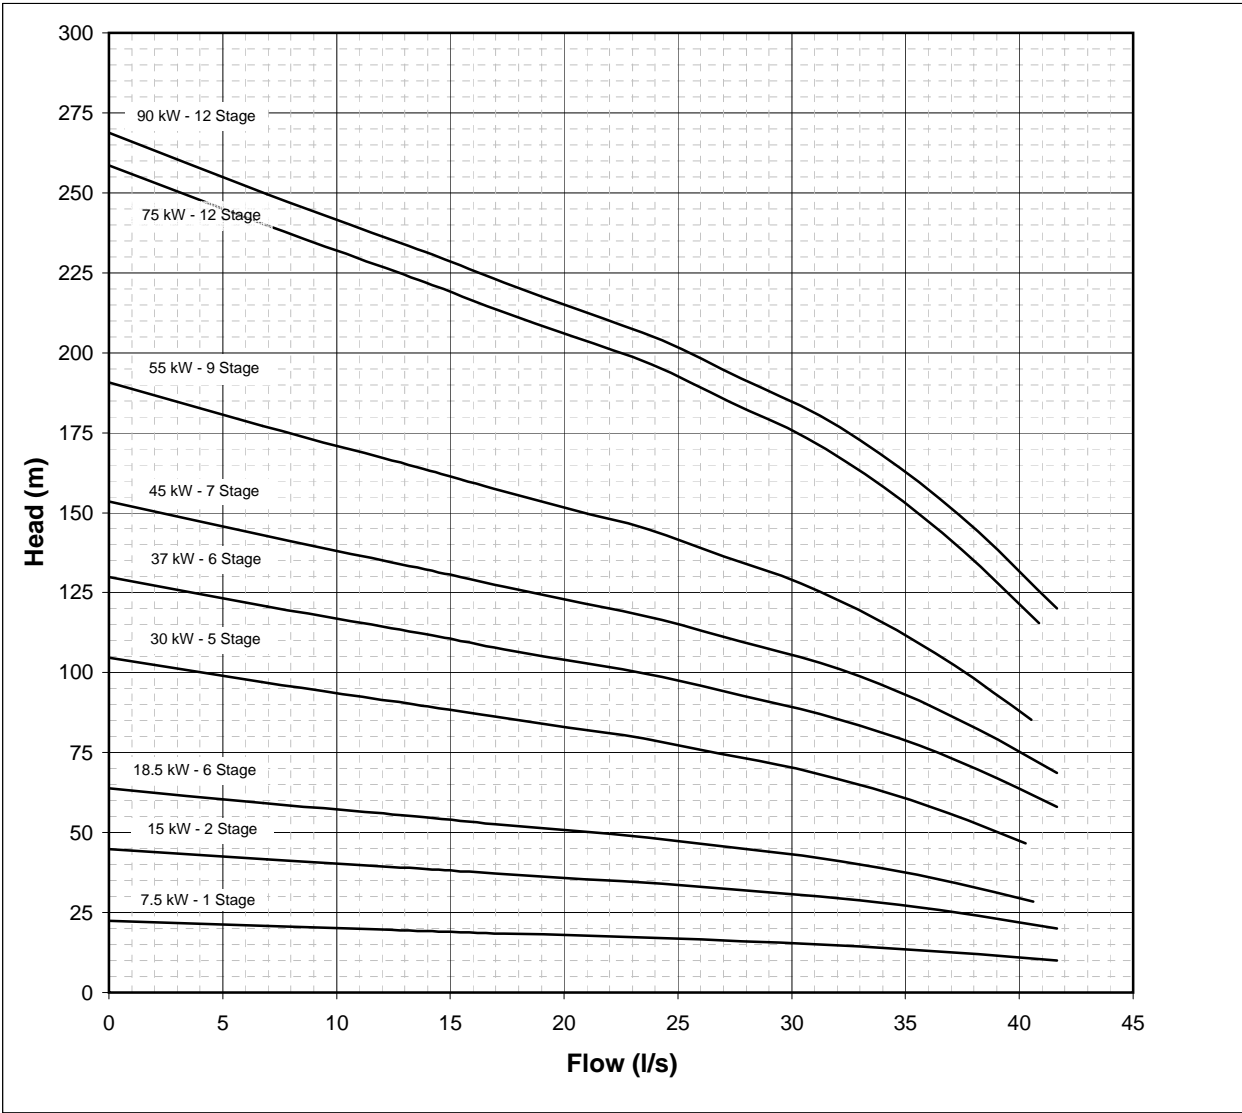

Nema Motor adaptor sizes available : 6 & 8 inch



Pump discharge sizes available, BSP threads : 4 & 6 inch

Maximum diameter of Pump including cable guard : 190.50 mm

Recommended Minimum flow rate at 2875 RPM : 10 l/s

Goulds Pumps



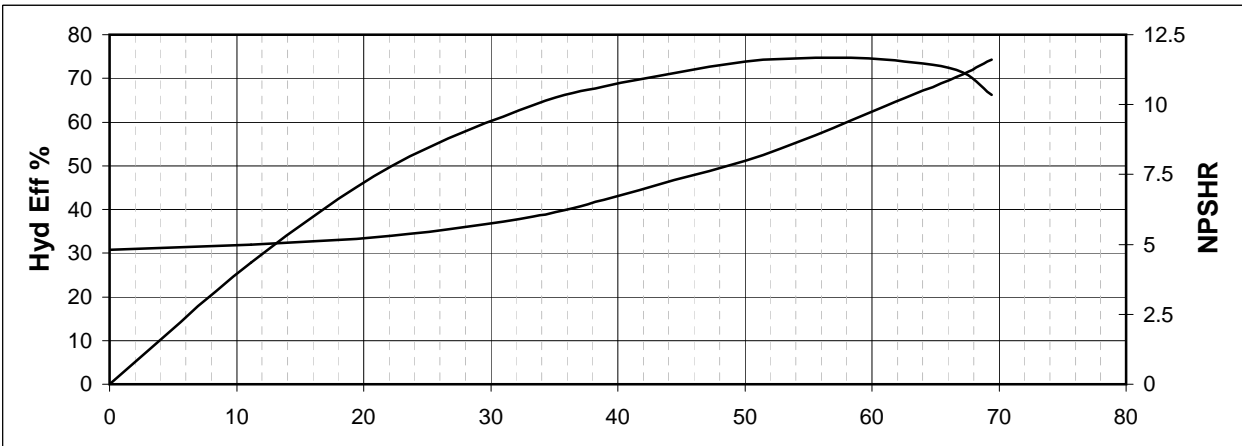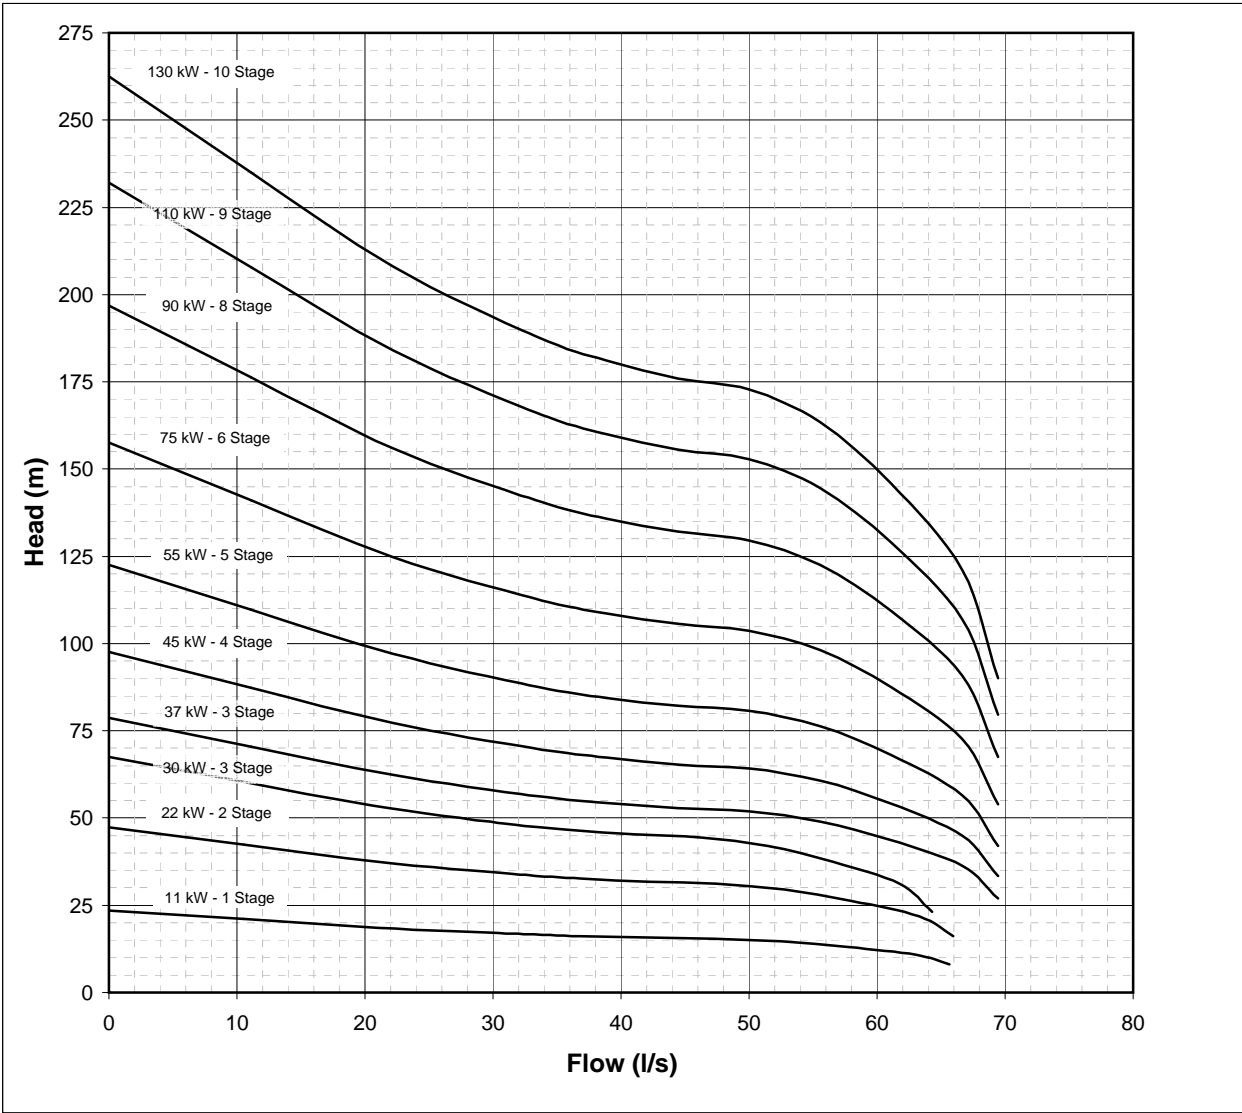

Nema Motor adaptor sizes available : 6 & 8 inch



Pump discharge sizes available, BSP threads : 4 & 6 inch

Maximum diameter of Pump including cable guard : 200.70 mm

Recommended Minimum flow rate at 2875 RPM : 20 l/s

Goulds Pumps



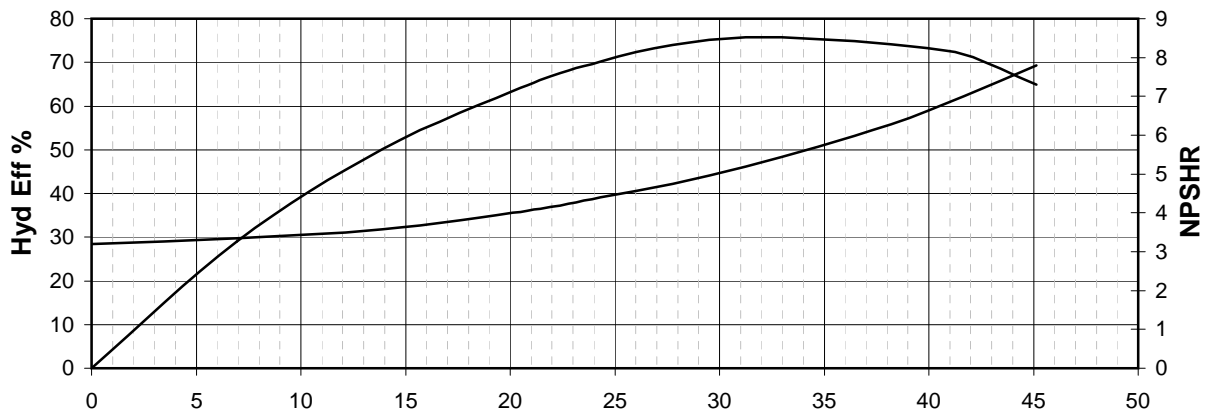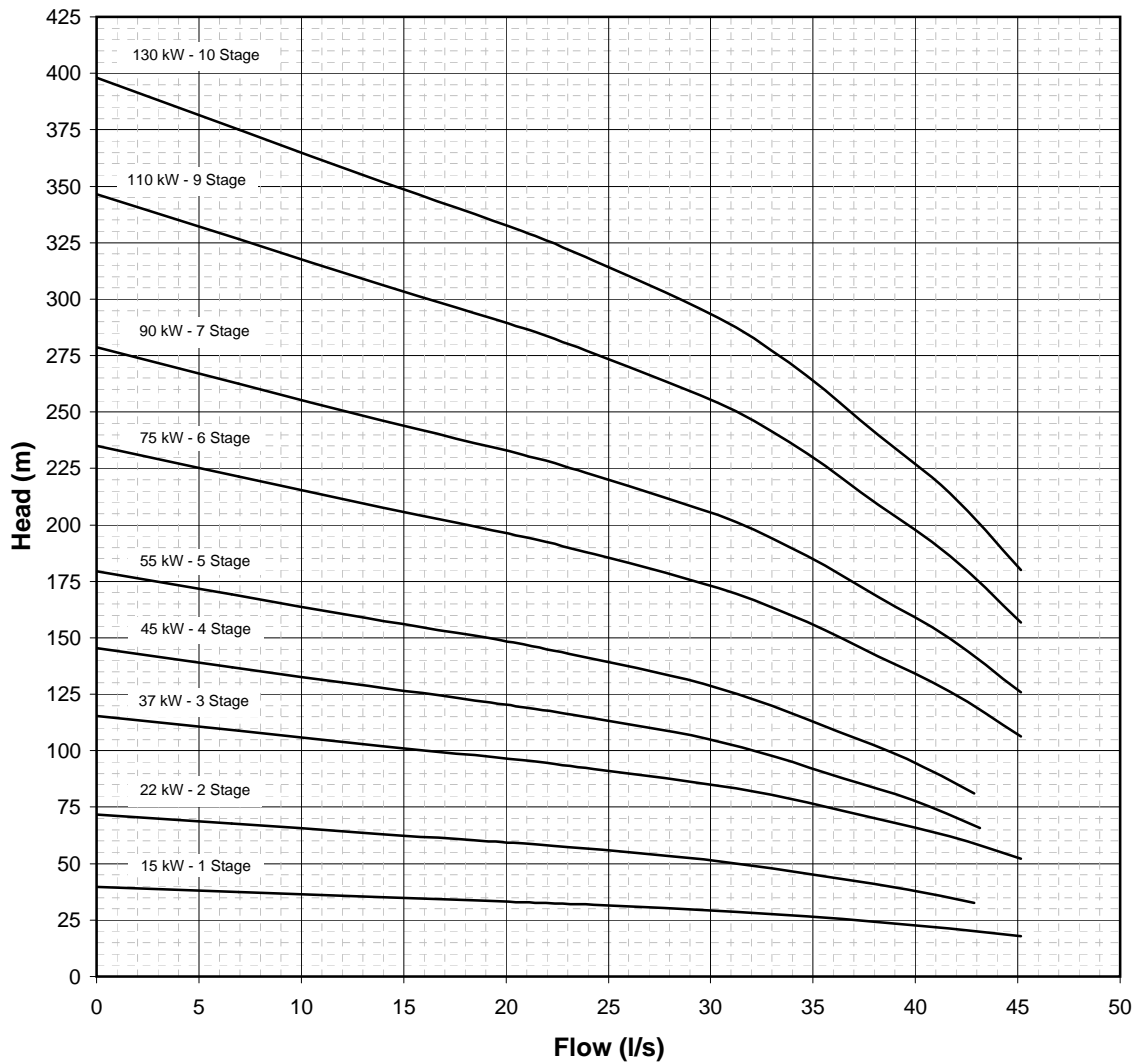

Nema Motor adaptor sizes available : 6 & 8 inch



Pump discharge sizes available, BSP threads : 6 inch

Maximum diameter of Pump including cable guard : 249.20 mm

Recommended Minimum flow rate at 2875 RPM : 13 l/s

Goulds Pumps



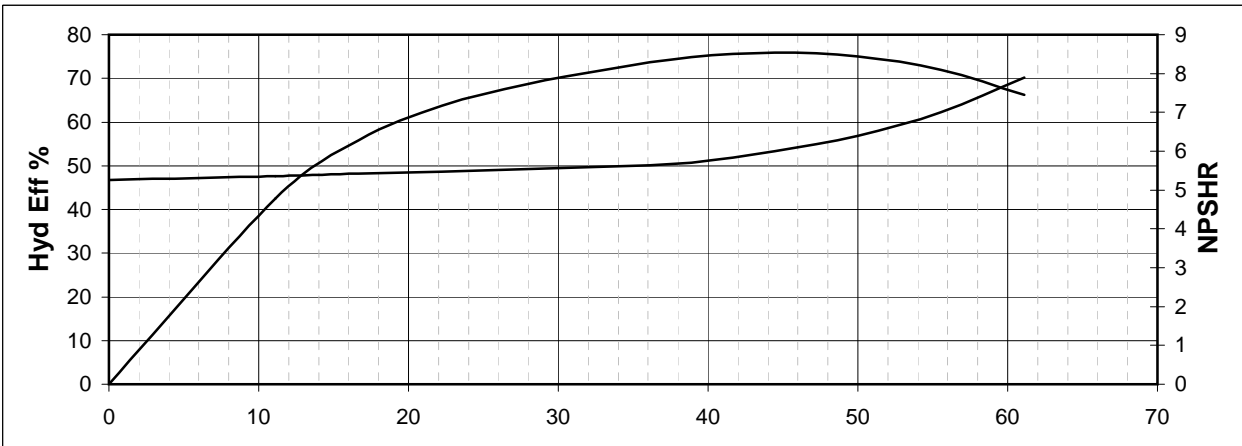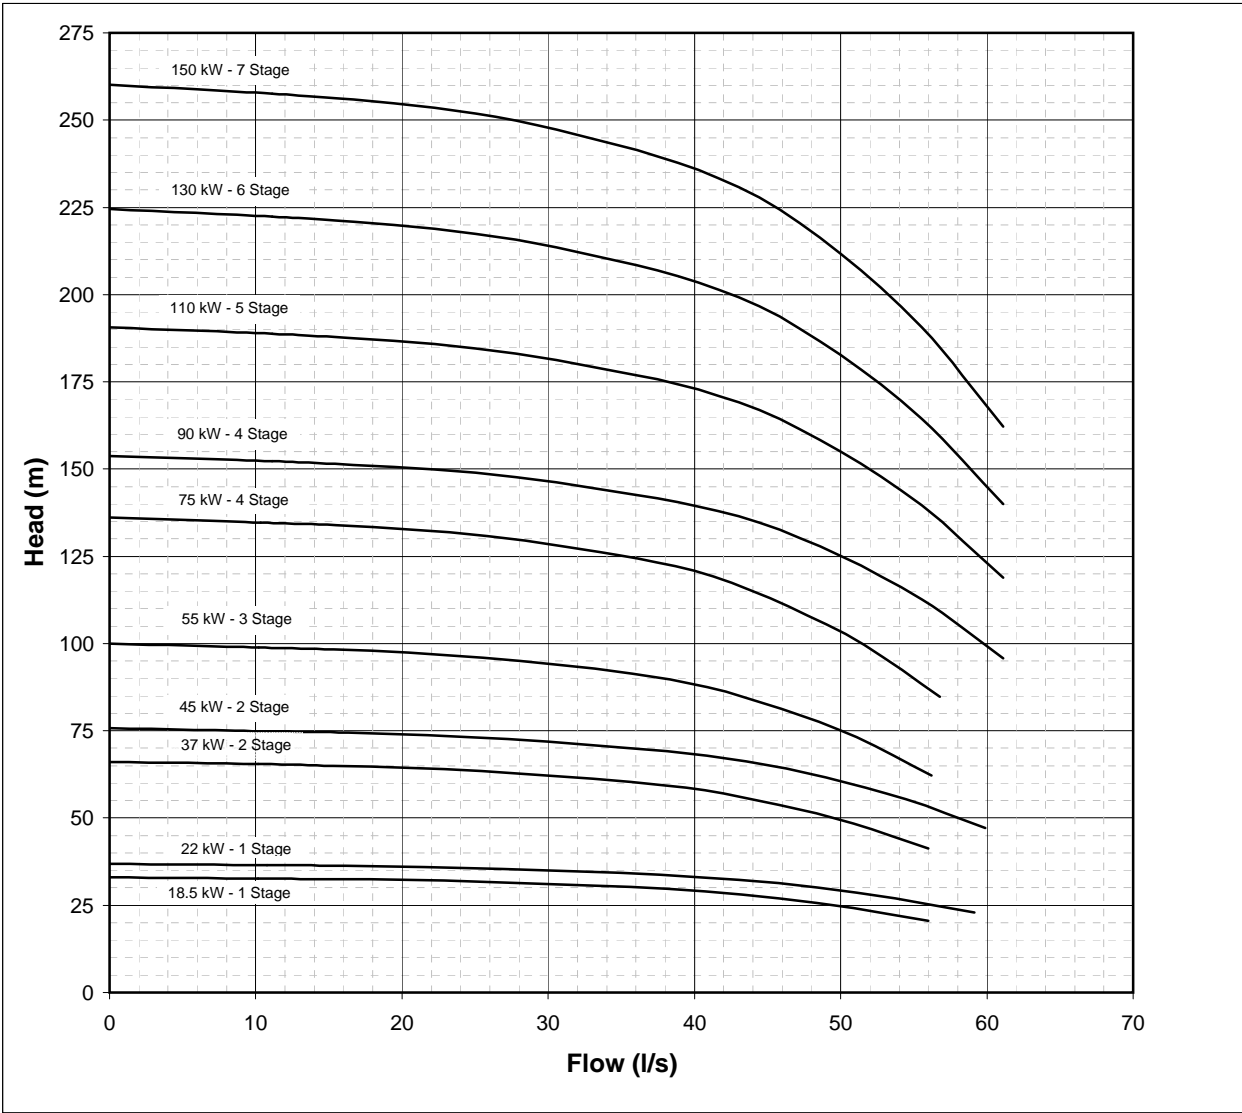

Nema Motor adaptor sizes available : 6 & 8 inch



Pump discharge sizes available, BSP threads : 6 inch

Maximum diameter of Pump including cable guard : 249.20 mm

Recommended Minimum flow rate at 2875 RPM : 18 l/s

Goulds Pumps



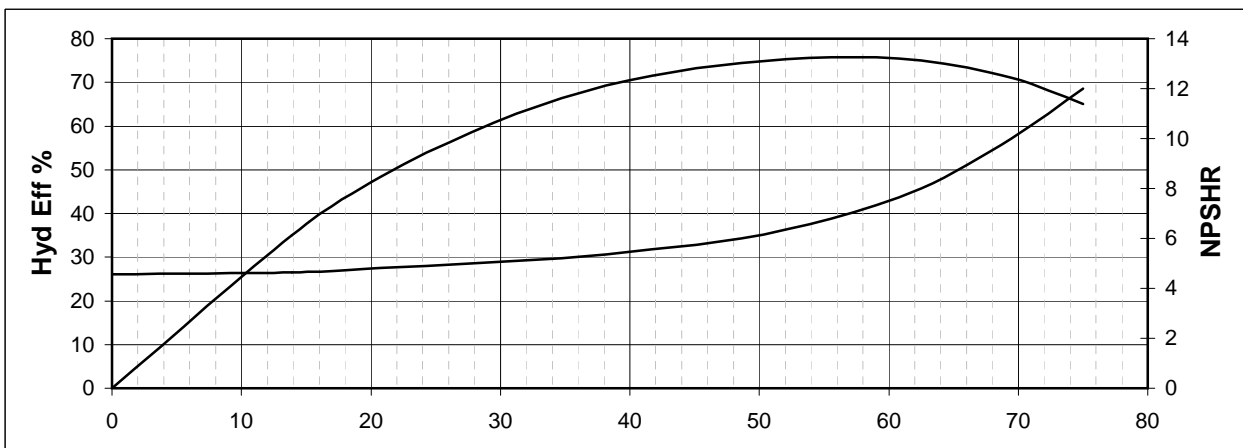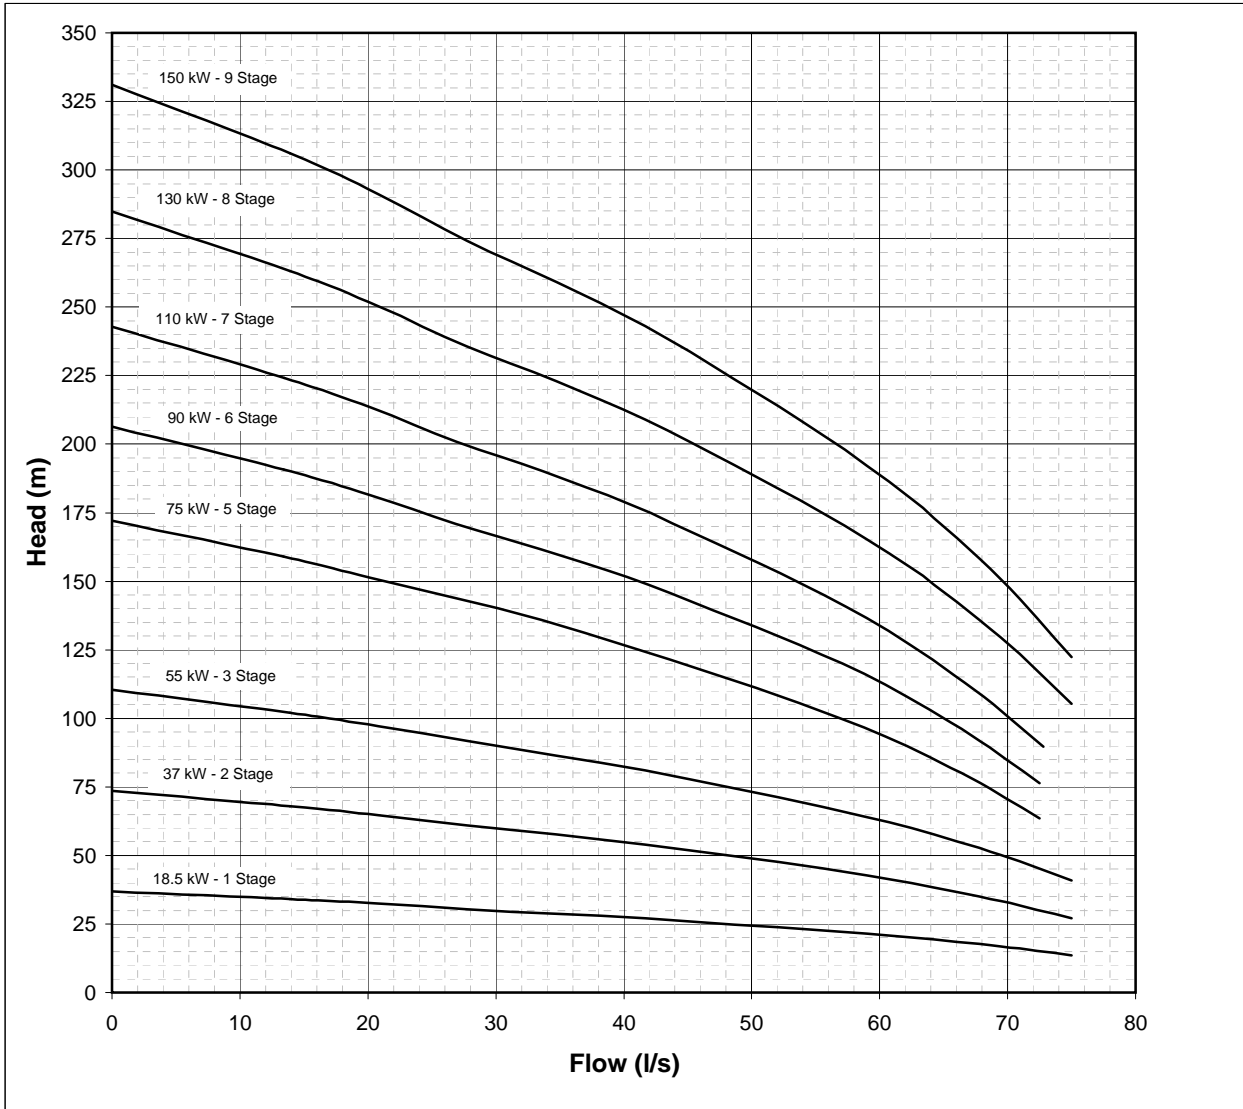

Nema Motor adaptor sizes available : 6 & 8 inch



Pump discharge sizes available, BSP threads : 6 inch

Maximum diameter of Pump including cable guard : 249.20 mm

Recommended Minimum flow rate at 2875 RPM : 20 l/s

Goulds Pumps



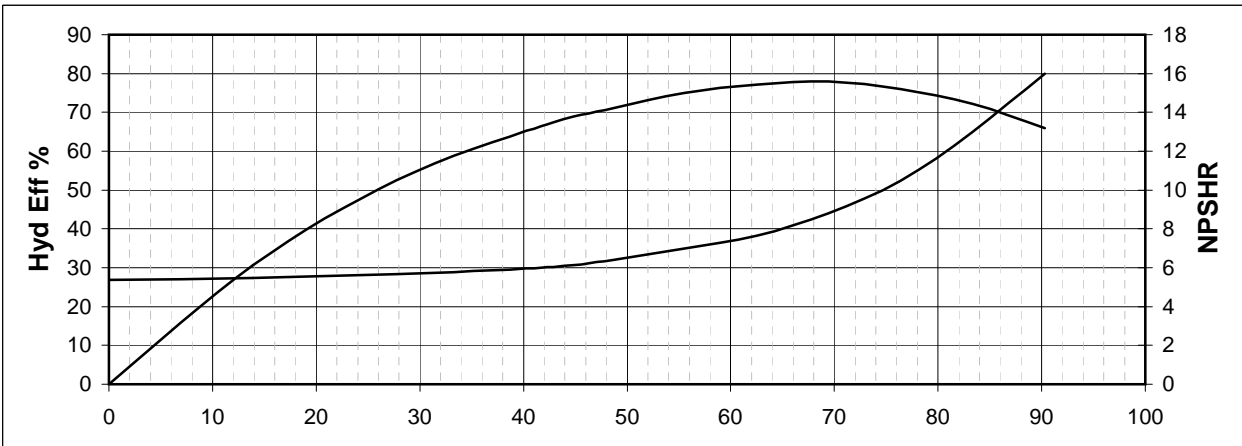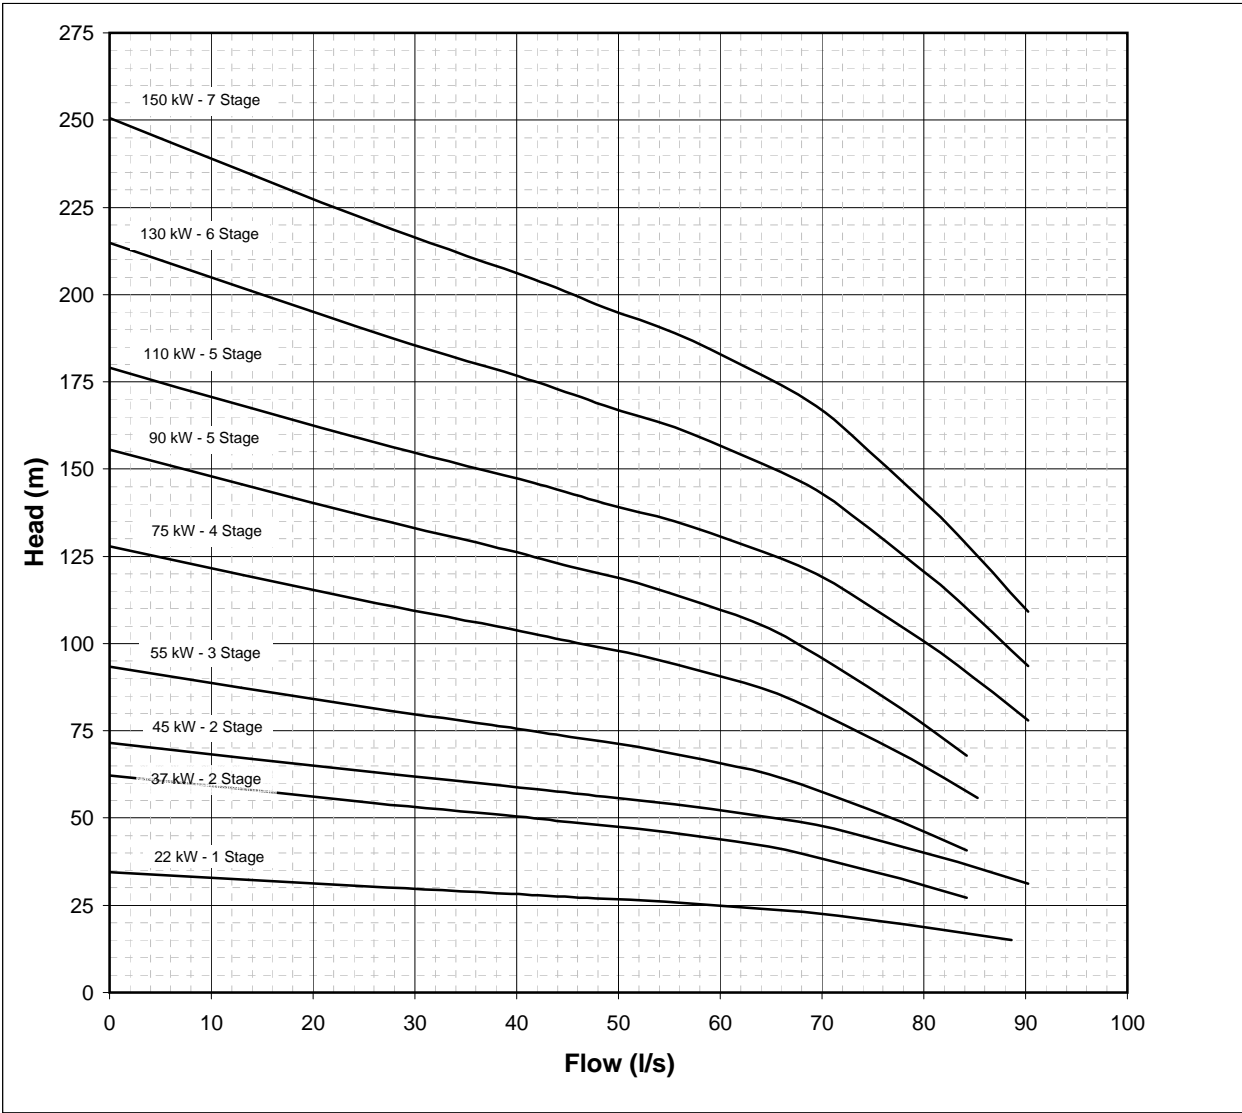

Nema Motor adaptor sizes available : 6 & 8 inch



Pump discharge sizes available, BSP threads : 6 inch

Maximum diameter of Pump including cable guard : 249.20 mm

Recommended Minimum flow rate at 2875 RPM : 26 l/s

Goulds Pumps



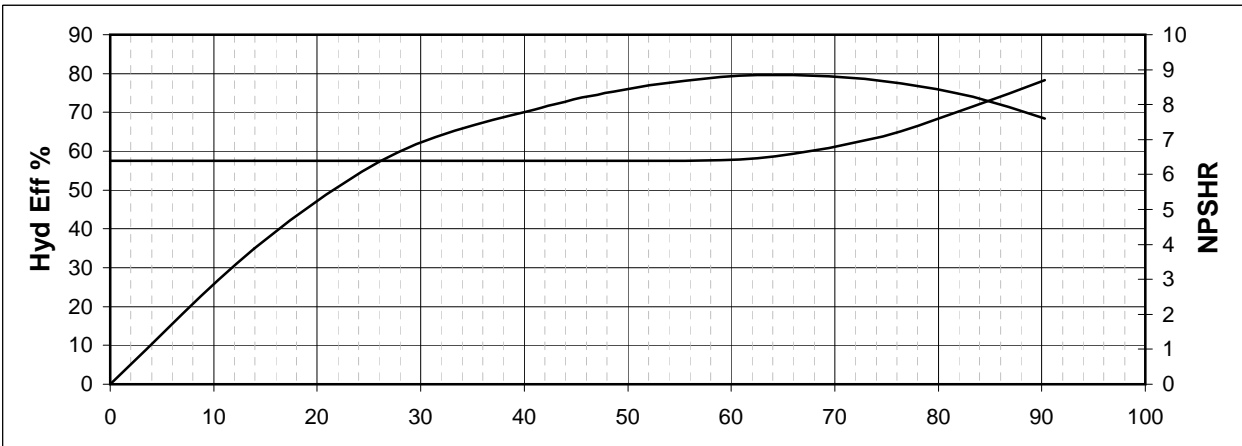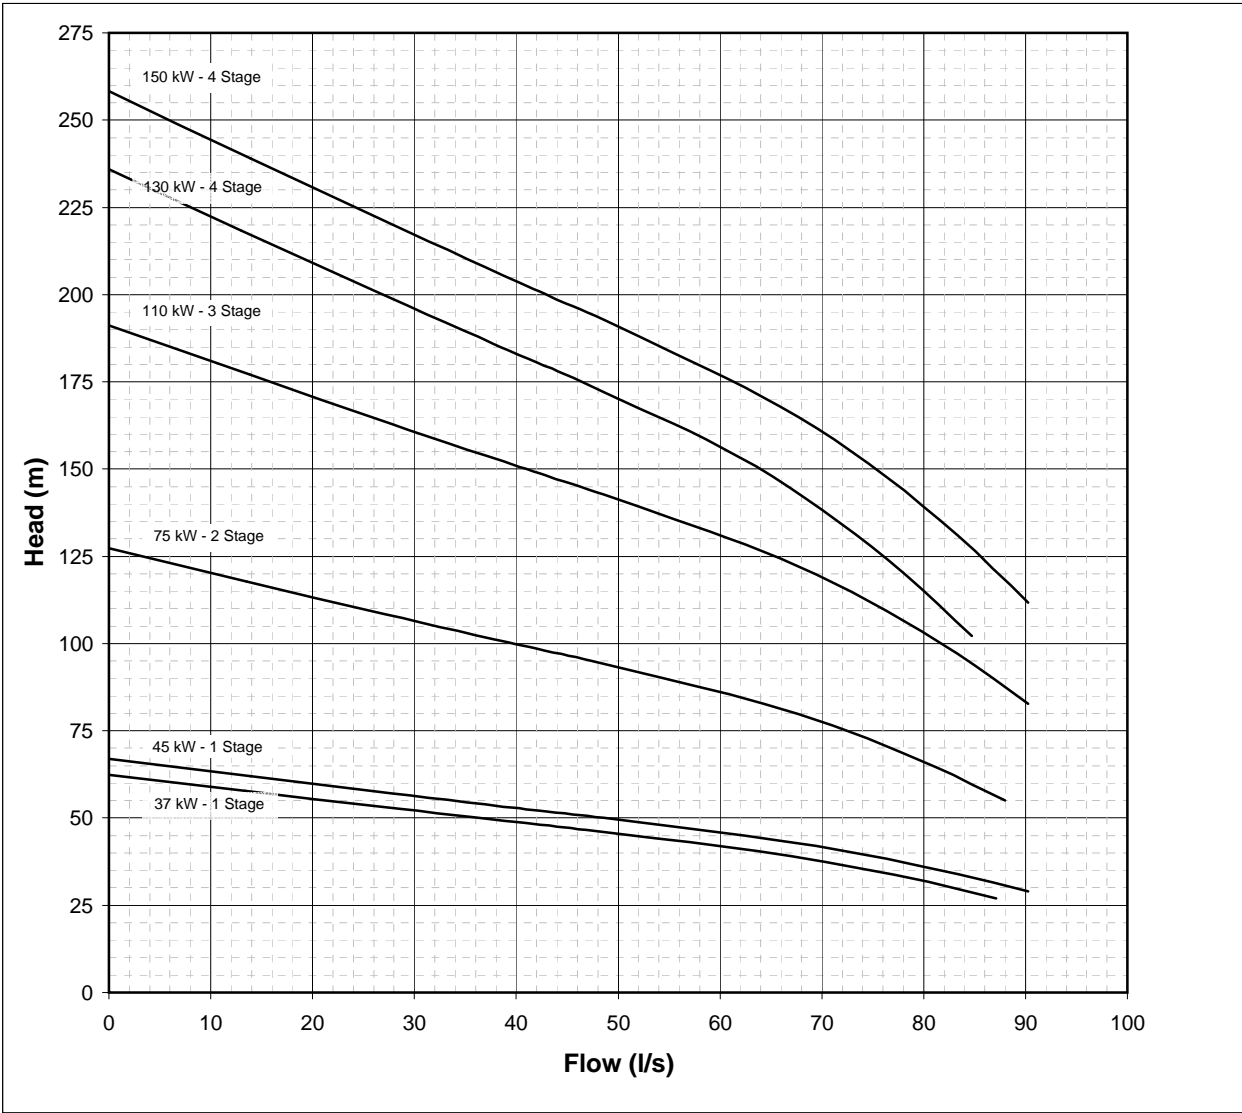

Nema Motor adaptor sizes available : 8 inch



Pump discharge sizes available, BSP threads : 6 & 8 inch

Maximum diameter of Pump including cable guard : 292.10 mm


Recommended Minimum flow rate at 2875 RPM : 28 l/s

Goulds Pumps



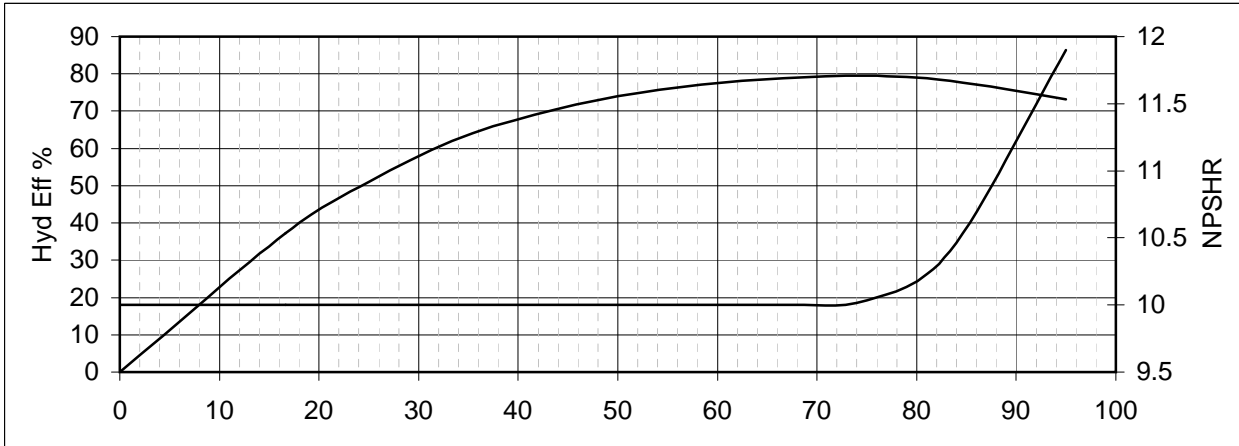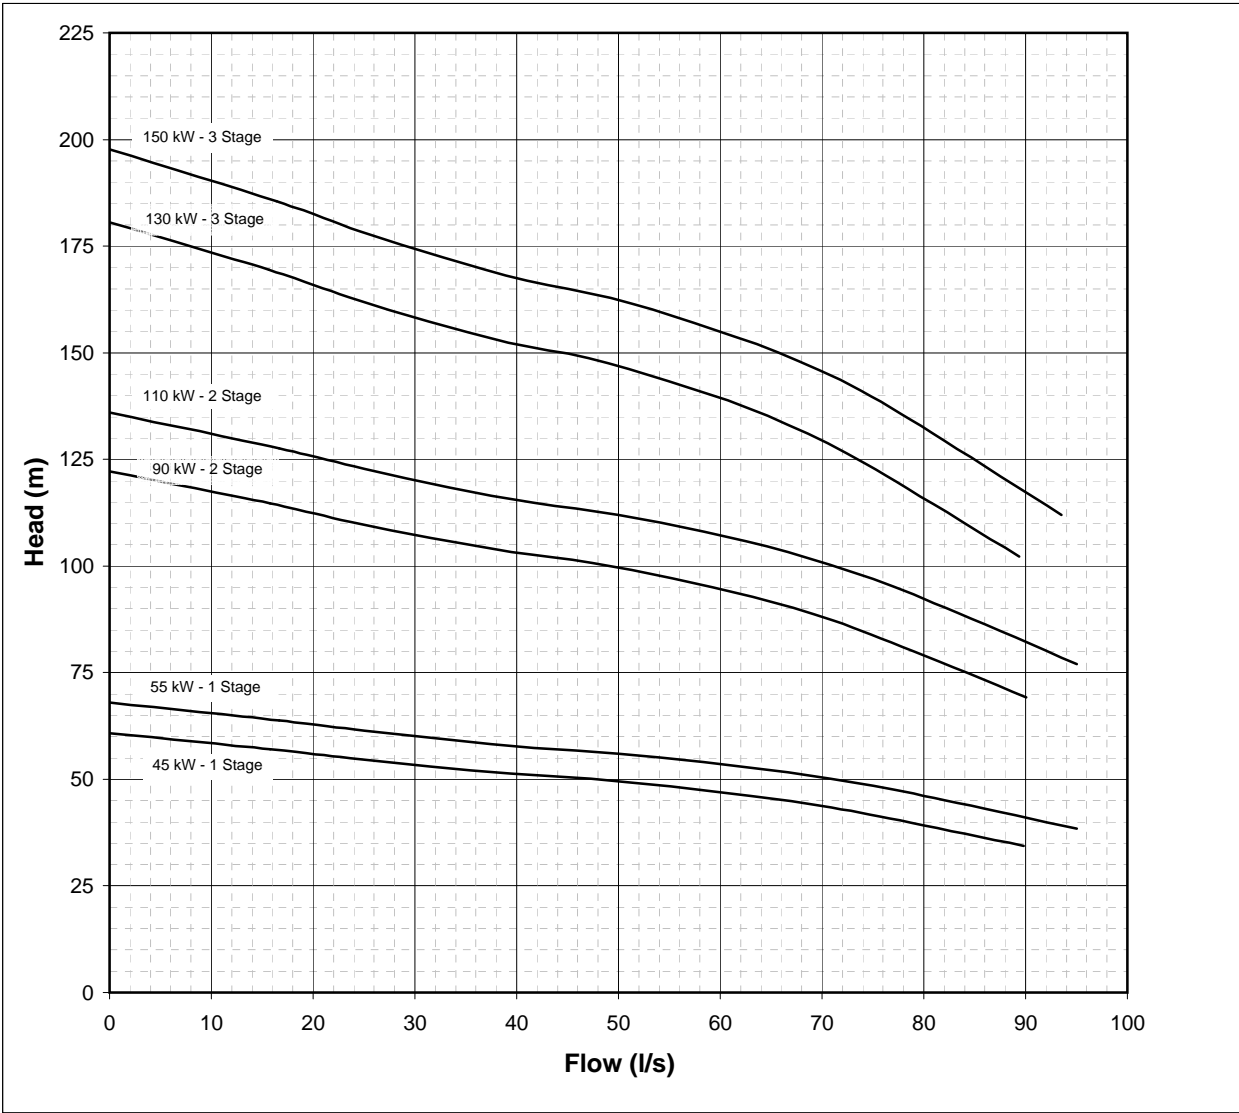

Nema Motor adaptor sizes available : 8 inch
 Pump discharge sizes available, BSP threads : 6 & 8 inch
 Maximum diameter of Pump including cable guard : 292.10 mm
 Recommended Minimum flow rate at 2875 RPM : 30 l/s

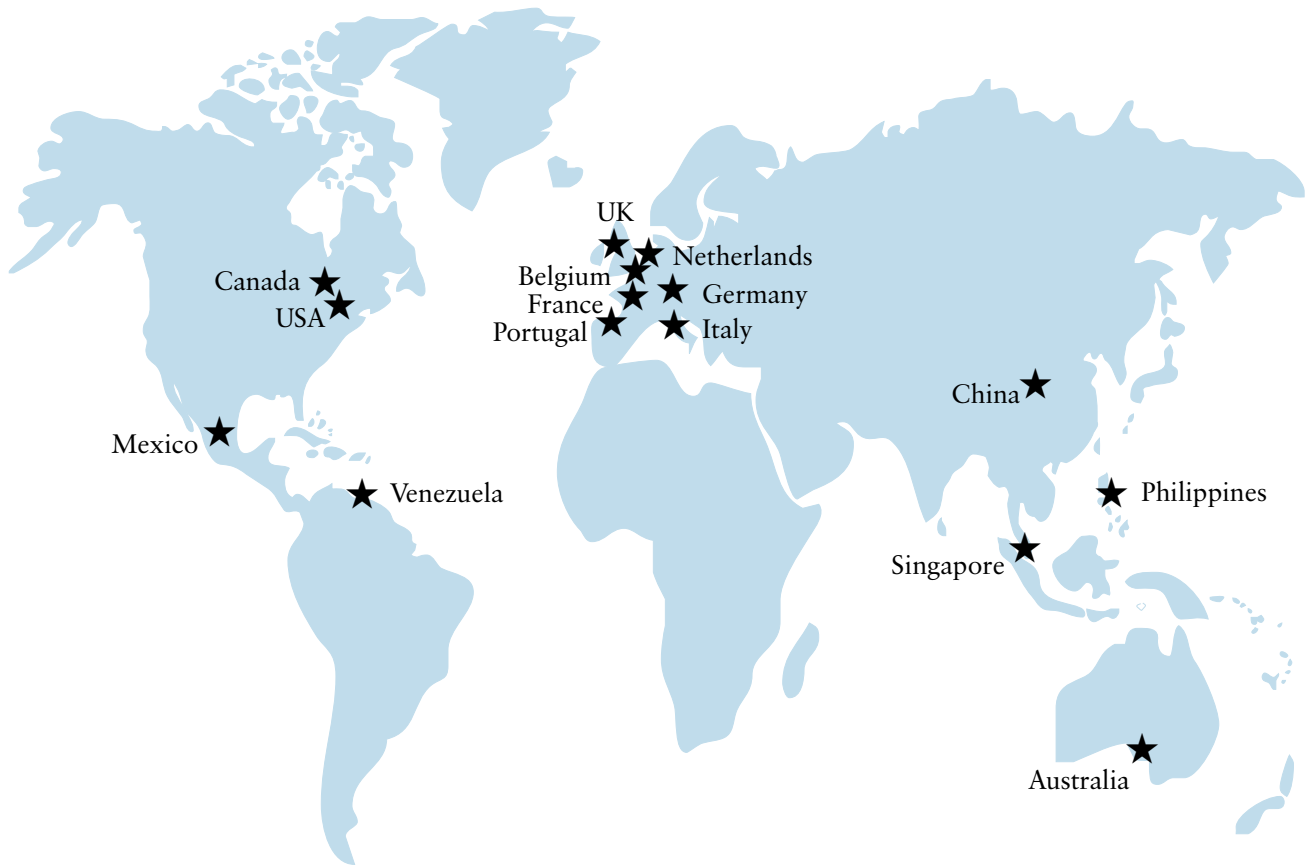

Goulds Pumps, Inc., headquartered in Seneca Falls, New York, designs, manufactures and services pumps motors and accessories for industrial, agricultural, commercial and residential markets. The company was founded in 1848 and remains an acknowledged industry leader. Sales offices and manufacturing facilities are located worldwide.

The Goulds Pumps, Inc. Water Technologies Group specifically manufactures pumps for home water systems, agriculture and irrigation, commercial applications, drainage, sewage and effluent installations. Manufacturing and distribution facilities are located in North and South America, Europe and Asia Pacific.

Turbine Distribution Centers:

	Phone	Fax
LUBBOCK, TX P.O. Box 5487, Lubbock, TX 79408	1-806-743-5700	1-806-743-5730
MEMPHIS, TN 5815 Shelby Drive, Memphis, TN 38141	1-901-375-9965	1-800-453-4745
LAKE MARY, FL 1150 Emma Oaks Trail, Suite 150, Lake Mary, FL 32746	1-407-829-7724	1-407-829-7725
FRESNO, CA 3878 S. Willow Ave., #104, Fresno, CA 93725	1-559-265-4730	1-800-453-7523 1-559-265-4740

Specifications & Special Projects:

LUBBOCK CUSTOMER SERVICE CENTER	1-806-743-5700	1-800-453-4749
--	-----------------------	-----------------------

Visit our website at www.goulds.com