



# LOWARA




STAINLESS STEEL DOMESTIC PRESSURE SYSTEMS

**Advanced design & materials**

**Highly corrosion resistant**

**Easily installed**

**Quiet, compact and efficient**

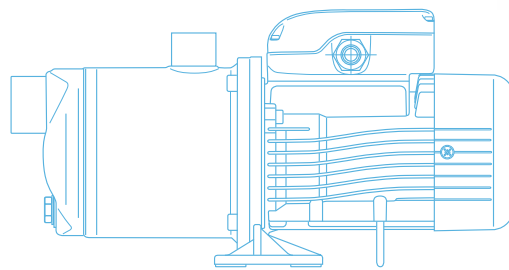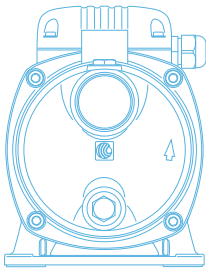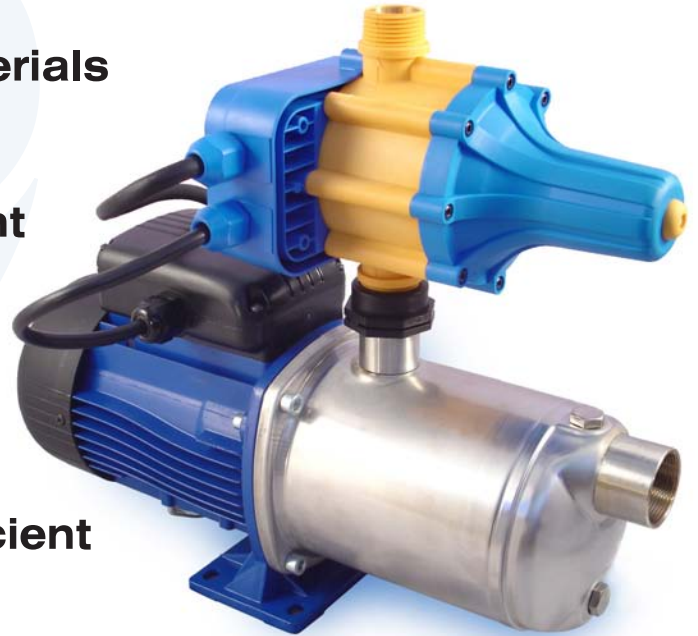

Featuring modern stainless steel pumps manufactured to the highest standards with laser welding technology, Lowara Pressure Systems deliver quiet, efficient and powerful performance to match any domestic water requirement.

They are supplied assembled, tested and ready to install.

## LOWARA PRESSURE SYSTEMS CAN BE CONTROLLED TWO WAYS



### **PRESSCONTROL**

A completely self-contained pump control device, Presscontrol will automatically cut in at 220KPa and keep your pump running, down to 0.6 litres/min.

This reduces pressure fluctuations that can occur with a standard pressure switch system.

Presscontrol will automatically stop your pump in run-dry situations, protecting it from damage.



### **PRESSURE SWITCH & TANK**

In the pressure tank system, the tank holds a reserve of water. When that reserve has been used, the switch detects a pressure drop and starts the pump.

Simple and reliable, this is still the most common method for controlling a pressure pump system.

**Delivering Pumping Solutions**



# LOWARA

EXCELLENCE IN STAINLESS STEEL




2HM-5 with pressure tank and switch

## HM Series

304 Stainless Steel Construction with technopolymer impellers

Model	Power	Flow Range	Pressure Range	Number of outlets
2HM-4	0.45 kW 0.6 Hp	20 - 60 l/min 4½ - 13 gal/min	315 - 155KPa 45 - 23psi	🔌 🔌 🔌 🔌
2HM-5	0.55 kW 0.75 Hp	20 - 60 l/min 4½ - 13 gal/min	410 - 215KPa 58 - 32psi	🔌 🔌 🔌 🔌 🔌
4HM-9	0.9 kW 1.2 Hp	40 - 110 l/min 9 - 24 gal/min	480 - 185KPa 70 - 27psi	🔌 🔌 🔌 🔌 🔌 🔌 🔌

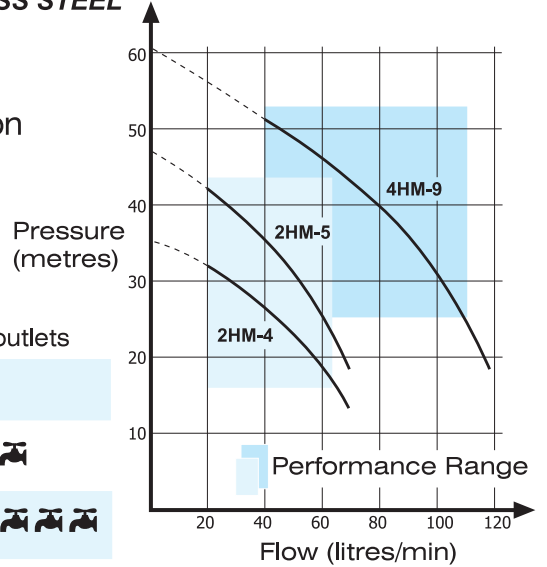


4HMS-7 with Presscontrol

## HMS Series

All 316 Stainless Steel Construction

Model	Power	Flow Range	Pressure Range	Number of outlets
2HMS-4	0.45 kW 0.6 Hp	20 - 60 l/min 4½ - 13gal/min	350 - 170KPa 50 - 24psi	🔌 🔌 🔌 🔌
2HMS-7	0.75 kW 1.0 Hp	20 - 60 l/min 4½ - 13 gal/min	450 - 215KPa 65 - 32psi	🔌 🔌 🔌 🔌 🔌
4HMS-7	0.75 kW 1.0 Hp	40 - 110 l/min 9 - 24 gal/min	380 - 115KPa 55 - 16psi	🔌 🔌 🔌 🔌 🔌 🔌 🔌

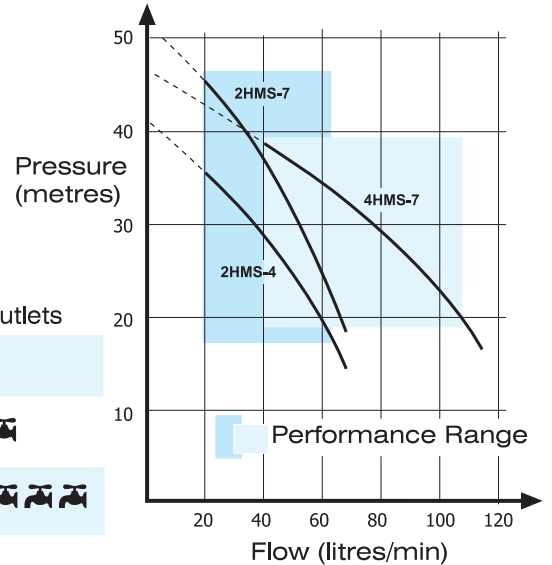


BGM-5 with Presscontrol

## BGM Series

304 Stainless Steel Self Priming to 8m

Model	Power	Flow Range	Pressure Range	Number of outlets
BGM-5	0.55 kW 0.75 Hp	10 - 55 l/min 2 - 12 gal/min	350 - 170KPa 50 - 24psi	🔌 🔌 🔌 🔌
BGM-9	0.9 kW 1.2 Hp	20 - 60 l/min 4½ - 13 gal/min	400 - 270KPa 58 - 40psi	🔌 🔌 🔌 🔌 🔌
BGM-11	1.1 kW 1.5 Hp	20 - 65 l/min 4½ - 14 gal/min	450 - 285KPa 65 - 41psi	🔌 🔌 🔌 🔌 🔌 🔌

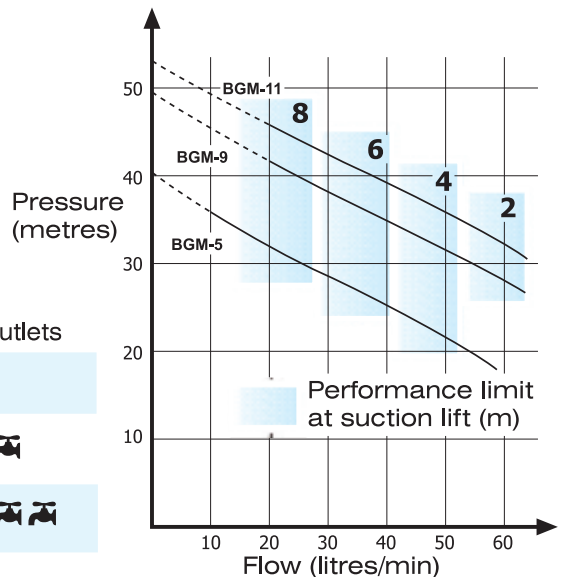

Lowara pumps incorporate high efficiency, IP55, continuous rated motors. The stainless steel pump casing is designed for pressures up to 8 Bar (116 psi).

Lowara give 2 years warranty on pumps and 5 years on Flexicon pressure tanks.

Your Authorised Dealer: